

2021-2022

TIRE CATALOG

WHEREVER YOU GO, ENJOY THE DRIVING WITH COMFORSER.



- www.volgatire.com
- Ankara, Turkey
- +90 532 3453584 / +90 531 0132775
- info@volgatire.com

SUV SERIES					
					
CF3000		CF3300		CF2000	
M/T		M/T		H/T	
 		 		 	
255/55R19	37×13.50R22LT	POR	LT235/65R17	35×12.50R20LT	205/70R14 215/55R18
LT205/70R15	33×12.50R24LT	POR	LT245/65R17	35×13.50R17LT	205/70R15 235/50R18
LT215/75R15	35×12.50R24LT	POR	LT265/65R17	LT265/70R17	215/75R15 235/55R18
LT235/75R15	37×13.50R24LT	POR	LT265/70R17	LT285/70R17	225/75R15 235/60R18
LT185/85R16	40×15.50R24LT	POR	LT285/70R17	LT285/55R20	235/75R15 265/60R18
LT215/85R16	37×13.50R26LT	POR	LT235/65R18	LT265/50R20	205/60R16 265/65R18
LT235/70R16	40×15.50R26LT	POR	LT265/60R18	37×13.50R17LT	205/65R16 275/65R18
LT245/70R16	42×15.50R28LT	POR	LT275/65R18	LT315/70R17	215/65R16 275/60R20
LT265/75R16	37×12.50R16.5LT	POR	LT285/65R18	LT285/65R18	215/70R16 LT215/75R15
LT285/75R16	POR 255/55R19	POR	31×10.50R15LT	LT275/55R20	225/70R16 LT245/70R17
LT315/75R16	POR 245/55R19	POR	32×11.50R15LT	LT305/55R20	235/70R16 LT265/70R17
LT265/65R17	POR LT205/70R15	POR	33×12.50R15LT	LT295/70R17	245/70R16
LT275/65R18	POR LT215/75R15	POR	35×12.50R15LT		255/70R16
LT285/60R18	POR LT235/75R15	POR	33×12.50R17LT		265/70R16
LT285/65R18	POR LT185/85R16	POR	35×12.50R17LT		265/75R16
31×10.50R15LT	POR LT215/85R16	POR	40×13.50R17LT		275/70R16
33×12.50R15LT	POR LT225/75R16	POR	33×12.50R18LT		215/60R17
37×12.50R17LT	POR LT235/70R16	POR	35×12.50R18LT		225/60R17
33×12.50R18LT	POR LT235/85R16	POR	33×12.50R20LT		225/65R17
35×12.50R18LT	POR LT245/70R16	POR	35×12.50R20LT		235/55R17
37×13.50R18LT	POR LT245/75R16	POR	35×13.50R20LT		235/60R17
35×12.50R20LT	POR LT265/70R16	POR	37×13.50R20LT		235/65R17
35×13.50R20LT	POR LT265/75R16	POR	35×12.50R22LT		245/65R17
37×13.50R20LT	POR LT275/70R16	POR	35×13.50R26LT		255/65R17
38×15.50R20LT	POR LT285/75R16				265/65R17
40×15.50R20LT	POR LT305/70R16				275/65R17
33×12.50R22LT	POR LT315/75R16				285/65R17
78 Sizes		12 Sizes		38 Sizes	
Page:11-14		Page:15-16		Page:17-18	

Note: OWL:Outlined White Letter.

SUV SERIES		RUN-FLAT SERIES		
				
CF1000		CF4000	CF4000	CF710
A/T		SUV/CUV	SUV/CUV	UHP
 				 
OWL P215/75R15	OWL POR LT235/85R16	225/55ZR18	245/50RF18	205/55RF16
OWL 225/70R15	OWL POR LT245/75R16	225/60R18	255/55RF18	225/45RF17
OWL P235/75R15	OWL POR LT265/70R16	245/50ZR18		225/50RF17
OWL P215/70R16	OWL POR LT265/75R16	245/60R18		225/55RF17
OWL 235/55R16	OWL POR LT285/75R16	255/55ZR18		225/40RF18
OWL 235/60R16	OWL POR LT265/70R17	255/55ZR19		225/45RF18
OWL P235/70R16	OWL POR LT285/70R17	245/40ZR20		245/40RF18
OWL P245/70R16	OWL POR 30×9.50R15LT	265/50ZR20		245/45RF18
OWL 255/70R16	OWL POR 31×10.50R15LT	275/40R20		255/40RF18
OWL P265/70R16	OWL POR 35×12.50R17LT	275/45ZR20		235/55RF19
OWL 225/60R17	OWL POR 35×12.50R18LT	275/55ZR20		245/40RF19
OWL P265/65R17	OWL POR 35×12.50R20LT	285/50ZR20		245/45RF19
OWL 255/60R18		295/35ZR21		255/50RF19
OWL 285/60R18				275/35RF19
OWL 265/50R20				275/40RF19
OWL LT235/85R16				
OWL LT245/75R16				
OWL LT265/70R16				
OWL LT265/75R16				
OWL LT285/75R16				
OWL LT265/70R17				
OWL LT285/70R17				
OWL 30×9.50R15LT				
OWL 31×10.50R15LT				
OWL 35×12.50R17LT				
OWL 35×12.50R18LT				
OWL 35×12.50R20LT				
39 Sizes		13 Sizes	2 Sizes	15 Sizes
Page:19-20		Page:21-22	Page:21-22	Page:23-26

HP SERIES



CF700

SPORTS K4

UHP



195/40ZR17
205/40ZR17
205/45ZR17
215/40ZR17
215/45ZR17
225/45ZR17
235/45ZR17
245/40ZR17
215/35ZR18
225/40ZR18
235/40ZR18
245/45ZR18
235/35ZR19
245/45ZR19
255/40ZR19
275/40ZR19
225/30ZR20
225/35ZR20
245/35ZR20
245/40ZR20
275/35ZR20

155/65R14
165/55R14
165/60R14
165/65R14
185/75R14
155/60R15
165/45R15
165/50R15
165/55R15
165/60R15
165/65R15
175/55R15
175/60R15
165/40R16
165/45R16
165/50R16

16 Sizes

Page:37-38

COMPETITION



THRUSTER

COMPETITION




Page:43-44

Note: WSW:White Sidewall. BSW:Black Sidewall. ▲ Pending.

CF3000

M/T POR



M+S
Rim Diameter:
15-28
Aspect Ratio:
85s-55s
Speed Rating:
N/P/Q/R

CF3000



Features and Benefits

Uni-directional tread design
with large shoulder blocks and center blocks are for maximum traction in tough road condition.

Shoulder design
for minimizing cut injury under severe road conditions.

Unique shoulder blocks, protection strip and 3D sidewall
enhance traction in muddy conditions and snowy conditions.



Special compound adopted
for strong tread and high tear resistance performance.

M/T


Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)
				OD	SW	NSD	Single	Dual	
255/55R19	111R XL	-	8.0	763	265	15.0	1090	-	340
LT205/70R15	96/93Q	6PR	6.0	675	209	14.0	710	650	350
LT215/75R15	100/97Q	6PR	6.0	709	216	14.0	800	730	350
LT235/75R15	104/101Q	6PR	6.5	739	235	14.0	900	825	350
LT185/85R16	98/95Q	6PR	5.0	684	184	11.0	750	690	350
LT215/85R16	115/112Q	10PR	6.0	778	216	14.0	1215	1120	550
LT235/70R16	110/107Q	8PR	7.0	742	240	14.0	1060	975	450
LT245/70R16	118/115Q	10PR	7.0	756	248	14.0	1320	1215	550
LT265/75R16	123/120Q	10PR	7.5	810	267	15.0	1550	1400	550
LT285/75R16	126/123Q	10PR	8.0	840	286	15.0	1700	1550	550
LT315/75R16	127/124Q	10PR	8.5	884	313	15.0	1750	1600	450
LT265/65R17	120/117Q	10PR	8.0	782	272	14.0	1400	1285	550
LT275/65R18	123/120Q	10PR	8.0	883	318	15.0	1550	1400	550
LT285/60R18	122/119Q	10PR	8.5	799	292	15.0	1500	1360	550
LT285/65R18	125/122Q	10PR	8.5	833	292	15.0	1650	1500	550
31×10.50R15LT	109Q	6PR	8.5	781	268	15.0	1030	-	350
33×12.50R15LT	108Q	6PR	10.0	832	318	15.0	1000	-	250
37×12.50R17LT	124Q	8PR	10.0	934	318	16.0	1600	-	350
33×12.50R18LT	118Q	10PR	10.0	832	318	15.0	1320	-	450
35×12.50R18LT	123Q	10PR	10.0	883	318	16.0	1550	-	450
37×13.50R18LT	128Q	10PR	11.0	934	345	16.0	1800	-	450
35×12.50R20LT	121Q	10PR	10.0	883	318	16.0	1450	-	450
35×13.50R20LT	124Q	10PR	11.0	883	345	16.0	1600	-	450
37×13.50R20LT	127Q	10PR	11.0	934	345	16.0	1750	-	450
38×15.50R20LT	125Q	8PR	12.0	959	390	14.0	1650	-	350
40×15.50R20LT	128Q	8PR	12.5	1010	390	16.0	1800	-	350
33×12.50R22LT	109Q	10PR	10.0	832	318	15.0	1030	-	450
37×13.50R22LT	123Q	10PR	11.0	934	345	16.0	1550	-	450
33×12.50R24LT	104Q	10PR	10.0	832	318	15.0	900	-	450
35×12.50R24LT	113Q	10PR	10.0	883	318	16.0	1150	-	450
37×13.50R24LT	120Q	10PR	11.0	934	345	16.0	1400	-	450
40×15.50R24LT	128P	10PR	12.0	1010	390	16.0	1800	-	450
37×13.50R26LT	117Q	10PR	11.0	934	345	16.0	1285	-	450
40×15.50R26LT	127P	10PR	12.0	1010	390	16.0	1750	-	450
42×15.50R28LT	128P	10PR	12.0	1061	390	14.0	1800	-	450
37×12.50R16.5LT	133N	10PR	9.75	934	318	16.0	2060	-	450

M/T(POR)

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)
				OD	SW	NSD	Single	Dual	
255/55R19	111Q XL	-	8.0	763	265	15.0	1090	-	340
245/55R19	107R XL	-	7.5	753	253	15.0	975	-	340
LT205/70R15	96/93Q	6PR	6.0	675	209	14.0	710	650	350
LT215/75R15	100/97Q	6PR	6.0	709	216	14.0	800	730	350
LT235/75R15	104/101Q	6PR	6.5	739	235	14.0	900	825	350
LT185/85R16	98/95Q	6PR	5.0	684	184	11.0	750	690	350
LT215/85R16	115/112Q	10PR	6.0	778	216	14.0	1215	1120	550
LT225/75R16	115/112Q	10PR	6.0	750	223	14.0	1215	1120	550
LT235/70R16	110/107Q	8PR	7.0	742	240	14.0	1060	975	450
LT235/85R16	120/116Q	10PR	6.5	812	235	15.0	1380	1260	550
LT245/70R16	118/115Q	10PR	7.0	756	248	14.0	1320	1215	550
LT245/75R16	120/116Q	10PR	7.0	780	248	15.0	1380	1260	550
LT265/70R16	121/118Q	10PR	8.0	784	272	15.0	1450	1320	550
LT265/75R16	119/116Q	8PR	7.5	810	267	15.0	1360	1250	450
LT275/70R16	119/116Q	8PR	8.0	798	279	15.0	1360	1250	450
LT285/75R16	116/113Q	6PR	8.0	840	286	15.0	1250	1150	350
LT305/70R16	118/115Q	8PR	9.0	840	311	15.0	1320	1215	350
LT315/75R16	121/118Q	8PR	8.5	884	313	15.0	1450	1320	350
LT235/65R17	109/105Q	8PR	7.0	738	240	15.0	1030	925	450
LT245/65R17	117/114Q	10PR	7.0	750	248	15.0	1285	1180	550
LT265/65R17	120/117Q	10PR	8.0	782	272	14.0	1400	1285	550
LT265/70R17	121/118Q	10PR	8.0	810	272	15.0	1450	1320	550
LT285/70R17	121/118Q	8PR	8.5	838	292	15.0	1450	1320	450
LT235/65R18	110/107Q	8PR	7.0	763	248	15.0	1060	975	450
LT265/60R18	119/116Q	10PR	8.0	775	272	15.0	1360	1250	550
LT275/65R18	113/110Q	6PR	8.0	883	318	15.0	1150	1060	350
LT285/65R18	121/118Q	8PR	8.5	833	292	15.0	1450	1320	450
31×10.50R15LT	109Q	6PR	8.5	781	268	15.0	1030	-	350
32×11.50R15LT	113Q	6PR	9.0	807	290	15.0	1150	-	350
33×12.50R15LT	108Q	6PR	10.0	832	318	15.0	1000	-	250
35×12.50R15LT	113Q	6PR	10.0	883	318	16.0	1150	-	250
33×12.50R17LT	114Q	8PR	10.0	832	318	15.0	1180	-	350
35×12.50R17LT	121Q	10PR	10.0	883	318	16.0	1450	-	450
40×13.50R17LT	121Q	8PR	11.0	1010	345	16.0	1450	-	350
33×12.50R18LT	118Q	10PR	10.0	832	318	15.0	1320	-	450
35×12.50R18LT	118Q	8PR	10.0	883	318	16.0	1320	-	350
33×12.50R20LT	114Q	10PR	10.0	832	318	15.0	1180	-	450
35×12.50R20LT	121Q	10PR	10.0	883	318	16.0	1450	-	450
35×13.50R20LT	121Q	10PR	11.0	883	345	16.0	1450	-	450
37×13.50R20LT	121Q	8PR	11.0	934	345	16.0	1450	-	350
35×12.50R22LT	117Q	10PR	10.0	883	318	16.0	1285	-	450
35×13.50R26LT	118Q	10PR	11.0	883	345	16.0	1320	-	450

CF3300

M/T



M+S
M/T: Mud Terrain Tire

Rim Diameter:
17-20

Speed Rating:
Q

CF3300



Features and Benefits

Wider tread width:
To improve tire grip effectively.

Multiply tread compound:
To provide outstanding traction, and increase the performance of cut resistance and tear resistance.




Strong tire shoulder structure and sidewall pattern blocks:
To protect tires well on all bad road conditions.

Powerful tire design:
All sizes with 3ply tire body and rim protector.

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)
				OD	SW	NSD	Single	Dual	
35×12.50R20LT	121Q	10PR	10J	883	318	13.6	1450	-	450
35×13.50R17LT	121Q	12	11J	883	345	13.6	1450	-	550
LT265/70R17	121/118Q	10	8J	804	272	13.6	1450	1320	550
LT285/70R17	121/118Q	10	81/2J	838	292	13.6	1450	1320	550
LT285/55R20	122/119Q	10	9J	822	297	13.6	1500	1360	550
LT265/50R20	115/112Q	10	81/2J	774	277	13.6	1215	1120	550
37×13.50R17LT	125Q	12	11J	934	345	13.6	1650	-	550
LT315/70R17	121/118Q	12	91/2J	874	323	13.6	1450	1320	550
LT285/65R18	125/122Q	10	81/2J	802	292	13.6	1650	1500	550
LT275/55R20	120/117Q	10	81/2J	810	284	13.6	1400	1280	550
LT305/55R20	125/122Q	12	91/2J	814	297	13.6	1650	1500	550
LT295/70R17	121/118Q	10	8 1/2J	874	309	13.6	1450	1320	550

CF2000

H/T



M+S

Rim Diameter:
14-20

Aspect Ratio:
75s-50s

Speed Rating:
S/T/H/V/W

CF2000



Features and Benefits

Designed for paved road use

Zigzag sipes on the shoulder block and tread

are for reducing noise level and improving traction in both wet and dry conditions.



4 circumferential grooves

for excellent water evacuation for good wet traction.

Wider center rib

for stable handling at high speed straight line driving.

Size	LI/SS	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)	UTQG
			OD	SW	NSD	Single	Dual		
205/70R14	95H	6.0	644	209	8.5	690	-	300	420AA
205/70R15	96H	6.0	669	209	8.5	710	-	300	420AA
215/75R15	100H	6.0	703	216	8.5	800	-	300	420AA
225/75R15	102H	6.0	719	223	8.5	850	-	300	420AA
235/75R15	105H	6.5	733	235	8.5	925	-	300	420AA
205/60R16	92V	6.0	652	209	8.5	630	-	300	420AA
205/65R16	95H	6.0	672	209	8.5	690	-	300	420AA
215/65R16	102H XL	6.5	686	221	8.5	850	-	340	420AA
215/70R16	100H	6.5	708	221	8.5	800	-	300	420AA
225/70R16	103H	6.5	722	228	8.5	875	-	300	420AA
235/70R16	106H	7.0	736	240	8.5	950	-	300	420AA
245/70R16	107H	7.0	750	248	8.5	975	-	300	420AA
255/70R16	111H	7.5	764	260	8.8	1090	-	300	420AA
265/70R16	112H	8.0	778	272	8.8	1120	-	300	420AA
265/75R16	116T	7.5	804	267	8.8	1250	-	300	420AA
275/70R16	114H	8.0	792	279	8.8	1180	-	300	420AA
215/60R17	96V	6.5	690	221	8.5	710	-	300	420AA
225/60R17	103H XL	6.5	702	228	8.5	875	-	340	420AA
225/65R17	102H	6.5	724	228	8.5	850	-	300	420AA
235/55R17	103W XL	7.5	690	245	8.5	875	-	340	420AA
235/60R17	106H XL	7.0	714	240	8.5	950	-	340	420AA
235/65R17	108H XL	7.0	738	240	8.5	1000	-	340	420AA
245/65R17	107H	7.0	750	248	8.5	975	-	300	420AA
255/65R17	110H	7.5	764	260	8.8	1060	-	300	420AA
265/65R17	112H	8.0	776	272	8.8	1120	-	300	420AA
275/65R17	119H XL	8.0	790	279	8.8	1360	-	340	420AA
285/65R17	116H	8.5	802	292	8.8	1250	-	300	420AA
215/55R18	99W XL	7.0	693	226	8.5	775	-	340	420AA
235/50R18	101W XL	7.5	693	245	8.5	825	-	340	420AA
235/55R18	104W XL	7.5	715	245	8.5	900	-	340	420AA
235/60R18	107H XL	7.0	739	240	8.5	975	-	340	420AA
265/60R18	114H XL	8.0	775	272	8.8	1180	-	340	420AA
265/65R18	114H	8.0	801	272	8.8	1180	-	300	420AA
275/65R18	116H	8.0	815	279	8.8	1250	-	300	420AA
275/60R20	115H	8.0	838	279	8.8	1215	-	300	420AA
LT215/75R15	116/114S 10PR	6.0	703	216	8.5	1250	1180	550	-
LT245/70R17	119/116S 10PR	7.0	776	248	10.8	1360	1250	550	-
LT265/70R17	121/118S 10PR	8.0	804	272	10.8	1450	1320	550	-

CF1000

A/T



M+S
Rim Diameter:
15-20

Aspect Ratio:
85s-50s

Speed Rating:
R/S/T/H

CF1000



Features and Benefits

Designed and built for all terrain use

on road driving considered high speed stability, off road driving, and strong traction. Given tough tread block.

Adopted special compound

or strong tread and high cut resistance performance.



3D block design

enhances the grip ability on both wet and dry road, which could availably protect the tread against injury under severe road conditions.

All series OWL design

provides aesthetics of the tire.

Sidewall	Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)	UTQG
					OD	SW	NSD	Single	Dual		
OWL	P215/75R15	100S	-	6.0	703	216	10.5	790	-	300	420AB
OWL	225/70R15	100T	-	6.5	697	228	10.8	800	-	300	420AB
OWL	P235/75R15	105S	-	6.5	733	235	10.8	920	-	300	420AB
OWL	P215/70R16	99T	-	6.5	708	221	10.5	775	-	300	420AB
OWL	235/55R16	98H	-	7.0	674	255	10.8	750	-	300	420AB
OWL	235/60R16	100H	-	7.0	688	240	10.8	800	-	300	420AB
OWL	P235/70R16	104T	-	7.0	736	240	10.8	900	-	300	420AB
OWL	P245/70R16	106T	-	7.0	750	248	10.8	950	-	300	420AB
OWL	255/70R16	111T	-	7.5	764	260	10.8	1090	-	300	420AA
OWL	P265/70R16	111T	-	8.0	778	272	10.8	1090	-	300	420AB
OWL	225/60R17	99H	-	6.5	702	228	10.8	775	-	300	420AB
OWL	P265/65R17	110T	-	8.0	776	272	10.8	1060	-	300	420AB
OWL	255/60R18	112H XL	-	7.5	763	260	10.8	1120	-	340	420AA
OWL	285/60R18	116T	-	8.5	799	292	10.8	1250	-	300	420AB
OWL	265/50R20	107T	-	8.5	774	277	9.8	975	-	300	420AB
OWL	LT235/85R16	120/116S	10PR	6.5	806	235	13.0	1380	1260	550	-
OWL	LT245/75R16	120/116S	10PR	7.0	774	248	13.0	1380	1260	550	-
OWL	LT265/70R16	121/118S	10PR	8.0	778	272	13.0	1450	1320	550	-
OWL	LT265/75R16	123/120S	10PR	7.5	804	267	13.0	1550	1400	550	-
OWL	LT285/75R16	126/123S	10PR	8.0	834	286	13.0	1700	1550	550	-
OWL	LT265/70R17	121/118S	10PR	8.0	804	272	13.0	1450	1320	550	-
OWL	LT285/70R17	121/118S	10PR	8.5	832	292	13.0	1450	1320	550	-
OWL	LT30×9.50R15	104R	6PR	7.5	750	240	13.0	900	-	350	-
OWL	31×10.50R15LT	109S	6PR	8.5	775	268	13.0	1030	-	350	-
OWL	35×12.50R17LT	121S	10PR	10.0	877	318	13.0	1450	-	450	-
OWL	35×12.50R18LT	123S	10PR	10.0	877	318	13.0	1550	-	450	-
OWL	35×12.50R20LT	121S	10PR	10.0	877	318	13.0	1450	-	450	-
OWL	POR LT235/85R16	120/116Q	10PR	6.5	806	235	13.0	1380	1260	550	-
OWL	POR LT245/75R16	120/116Q	10PR	7.0	774	248	13.0	1380	1260	550	-
OWL	POR LT265/75R16	119/116Q	8PR	7.5	804	267	13.0	1360	1250	450	-
OWL	POR LT285/75R16	116/113Q	6PR	8.0	834	286	13.0	1250	1150	350	-
OWL	POR LT265/70R16	121/118Q	10PR	8.0	778	272	13.0	1450	1320	550	-
OWL	POR LT265/70R17	121/118Q	10PR	8.0	804	272	13.0	1450	1320	550	-
OWL	POR LT285/70R17	121/118Q	10PR	8.5	832	292	13.0	1450	1320	550	-
OWL	POR LT30×9.50R15	104Q	6PR	7.5	750	240	13.0	900	-	350	-
OWL	POR LT31×10.50R15	109Q	6PR	8.5	775	268	13.0	1030	-	350	-
OWL	POR 35×12.50R17LT	121Q	10PR	10.0	877	318	13.0	1450	-	450	-
OWL	POR 35×12.50R18LT	118Q	8PR	10.0	877	318	13.0	1320	-	350	-
OWL	POR 35×12.50R20LT	121Q	10PR	10.0	877	318	13.0	1450	-	450	-

OWL: Outlined White Letter

CF4000

SUV/CUV



M+S
Rim Diameter:
18-21

Aspect Ratio:
60s-35s

Speed Rating:
H/V/W/Y


CF4000

Applicable models

Features and Benefits

Asymmetric tread design
for excellent riding stability and precise handling on wet roads.

Various sipings and Lateral grooves
efficiently reduce the rinding noise.

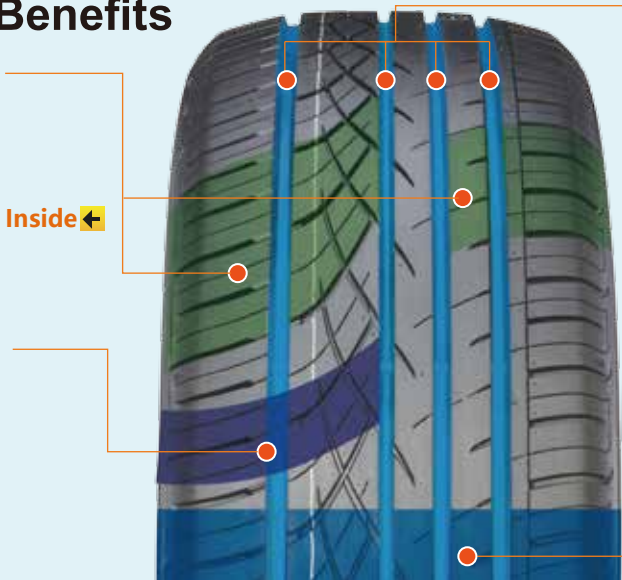

4 Circumferential grooves
for excellent water evacuation, minimize the risk of aquaplaning at high speed.



Silica tread compound
for lower rolling resistance and better grip performance.

SUV/CUV

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
225/55ZR18	102W	XL	7.0J	705	233	8.3	850	340	320AA
225/60R18	104H	XL	6.5J	727	228	8.3	900	300	320AA
245/50ZR18	104W	XL	7.5J	703	253	8.3	900	340	320AA
245/60R18	105V	Std	7.0J	751	248	8.3	925	340	320AA
255/55ZR18	109W	XL	8.0J	737	265	8.3	1030	340	320AA
255/55ZR19	111W	XL	8.0J	763	265	8.3	1090	340	320AA
245/40ZR20	99Y	XL	8.5J	704	248	8.5	775	340	320AA
265/50ZR20	111W	XL	8.5J	774	277	8.3	1090	340	320AA
275/40R20	106W	XL	9.5J	728	278	8.5	950	340	320AA
275/45ZR20	110W	XL	9.0J	756	273	8.5	1060	340	320AA
275/55ZR20	117W	XL	8.5J	810	284	8.3	1285	340	320AA
285/50ZR20	116W	XL	9.0J	794	297	8.3	1250	340	320AA
295/35ZR21	107W	XL	10.5J	739	301	8.3	975	340	320AA

RFT

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
245/50RF18	100V	Std	7.5J	703	253	8.2	800	300	320AA
255/55RF18	105V	Std	8.0J	737	265	8.2	925	300	320AA

CF710
UHP



M+S
Rim Diameter:
15-20

Aspect Ratio:
55s-30s

Speed Rating:
V/W/Y

CF710



Features and Benefits

3+1 Longitudinal grooves
enhance the wet grip performance to prevent the aquaplaning.

Variable pitch design
from inside and outside greatly reduces the riding noise.



Asymmetric tread design
outside with strong shoulder for good turning stability, inside shoulder with multisipes for excellent water drainage.

Wider centre rib
for stable handling with straight line driving at high speed.

UHP

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
185/50R16	81V	Std	6J	592	194	8.0	462	300	380/A/A
195/45R16	84V	XL	6.5J	582	195	8.0	500	340	380/A/A
195/50R16	84V	Std	6J	602	201	8.0	500	300	380/A/A
205/45R16	83V	Std	7J	590	206	8.0	487	300	380/A/A
205/50R16	87V	Std	6.5J	612	214	8.0	545	300	380/A/A
205/50R16	87W	Std	6.5J	612	214	8.0	545	300	380/A/A
215/55R16	97W	XL	7J	642	226	8.0	730	340	380/A/A
215/55R16	97V	XL	7J	642	226	8.0	730	340	380/A/A
225/55R16	95V	Std	7J	654	233	8.0	690	300	380/A/A
225/55R16	99W	XL	7J	654	233	8.0	775	340	380/A/A
195/40ZR17	81W	XL	7J	588	200	8.2	462	340	380/A/A
205/40ZR17	84W	XL	7.5J	596	212	8.0	500	340	380/A/A
205/45R17	88W	XL	7J	616	206	8.0	560	340	380/A/A
205/50R17	93W	XL	6.5J	638	214	8.0	650	340	380/A/A
205/55R17	95W	XL	6.5J	658	214	8.2	690	340	380/A/A

UHP

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
215/45ZR17	91W	XL	7J	626	213	8.0	615	340	380/A/A
215/50R17	95W	XL	7J	648	226	8.0	690	340	380/A/A
215/55R17	98W	XL	7J	668	226	8.0	750	340	380/A/A
225/45ZR17	94W	XL	7.5J	634	225	8.0	670	340	380/A/A
225/50R17	98W	XL	7J	658	233	8.0	750	340	380/A/A
225/55R17	101W	XL	7J	680	233	8.0	825	340	380/A/A
235/45ZR17	97W	XL	8J	644	236	8.2	730	340	380/A/A
235/50R17	100W	XL	7.5J	668	245	8.2	800	340	380/A/A
235/55R17	103W	XL	7.5J	690	245	8.2	875	340	380/A/A
245/45ZR17	99W	XL	8J	652	243	8.2	775	340	380/A/A
255/45ZR17	102W	XL	8.5J	662	255	8.3	850	340	380/A/A
205/40ZR18	86W	XL	7.5J	621	212	8.0	530	340	380/A/A
215/35ZR18	84W	XL	7.5J	607	218	8.2	500	340	380/A/A
215/40ZR18	89W	XL	7.5J	629	218	8.0	580	340	380/A/A
215/45ZR18	93W	XL	7J	651	213	8.0	650	340	380/A/A
225/40ZR18	92W	XL	8J	637	230	8.0	630	340	380/A/A
225/45ZR18	95W	XL	7.5J	659	225	8.0	690	340	380/A/A
235/40ZR18	95W	XL	8.5J	645	241	8.2	690	340	380/A/A
235/45ZR18	98W	XL	8J	669	236	8.2	750	340	380/A/A
245/40ZR18	97W	XL	8.5J	653	248	8.2	730	340	380/A/A
245/45ZR18	100W	XL	8J	677	243	8.2	800	340	380/A/A
255/35ZR18	94Y	XL	9J	635	260	8.2	670	340	380/A/A
255/40ZR18	99W	XL	9J	661	260	8.5	775	340	380/A/A
255/45ZR18	103W	XL	8.5J	687	255	8.5	875	340	380/A/A
225/40ZR19	93W	XL	8J	663	230	8.0	650	340	380/A/A
225/55R19	103W	XL	7J	731	233	8.2	875	340	380/A/A
235/35ZR19	91W	XL	8.5J	647	241	8.2	615	340	380/A/A
235/40ZR19	96W	XL	8.5J	671	241	8.2	710	340	380/A/A
235/55R19	105W	XL	7.5J	741	245	8.2	925	340	380/A/A
245/35ZR19	93W	XL	8.5J	655	248	8.2	650	340	380/A/A
245/40ZR19	98W	XL	8.5J	679	248	8.2	750	340	380/A/A
245/45ZR19	102W	XL	8J	703	243	8.2	850	340	380/A/A
245/55R19	107W	XL	7.5J	753	253	8.2	975	340	380/A/A


Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
255/35ZR19	96Y	XL	9J	661	260	8.2	710	340	380/A/A
255/40ZR19	100Y	XL	9J	687	260	8.2	800	340	380/A/A
255/50R19	107W	XL	8J	739	265	8.2	975	340	380/A/A
275/35ZR19	96Y	Std	9.5	675	278	8.2	710	300	380/A/A
275/40ZR19	105W	XL	9.5J	703	278	8.5	925	340	380/A/A
295/30ZR19	100W	XL	10.5J	661	301	8.5	800	340	380/A/A
225/30ZR20	85W	XL	8J	644	230	8.2	515	340	380/A/A
245/35ZR20	95W	XL	8.5J	680	248	8.2	690	340	380/A/A
255/35ZR20	97W	XL	9J	686	260	8.5	730	340	380/A/A
275/30ZR20	97Y	XL	9.5J	674	278	8.2	730	340	380/A/A
275/45ZR21	110W	XL	9J	781	273	8.2	1060	340	380/A/A

RFT

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
205/55RF16	91V	Std	6.5	632	214	8.2	615	300	380 A A
225/45RF17	94W	XL	7.5	634	225	8.2	570	340	380 A A
225/50RF17	98V	XL	7	658	233	8.2	750	350	380 A A
225/55RF17	101V	XL	7	680	233	8.2	825	350	380 A A
225/40RF18	92W	XL	8	637	230	8.2	630	340	380 A A
225/45RF18	95W	XL	7.5	659	225	8.2	690	340	380 A A
245/40RF18	97V	XL	8.5	653	248	8.2	730	340	380 A A
245/45RF18	100V	XL	8	677	248	8.2	800	340	380 A A
255/40RF18	99W	XL	9	661	260	8.2	775	340	380 A A
235/55RF19	101W	Std	7.5	741	245	8.2	825	300	380 A A
245/40RF19	98W	XL	8.5	679	248	8.2	750	340	380 A A
245/45RF19	102W	XL	8	703	243	8.2	850	340	380 A A
255/50RF19	103W	Std	8	739	265	8.2	875	300	380 A A
275/35RF19	100W	XL	9.5	675	278	8.2	800	340	380 A A
275/40RF19	101W	Std	9.5	703	278	8.2	825	300	380 A A

CF720

UHP



M+S
Rim Diameter:
22-28

Aspect Ratio:
45s-25s

Speed Rating:
W/Y

CF720




Features and Benefits

Flowing uni-directional tread design

on road driving considered high speed stability, off road driving, and strong traction. Given tough tread block.

Newly developed shoulder design

solve irregular wear problem and minimize noise level.

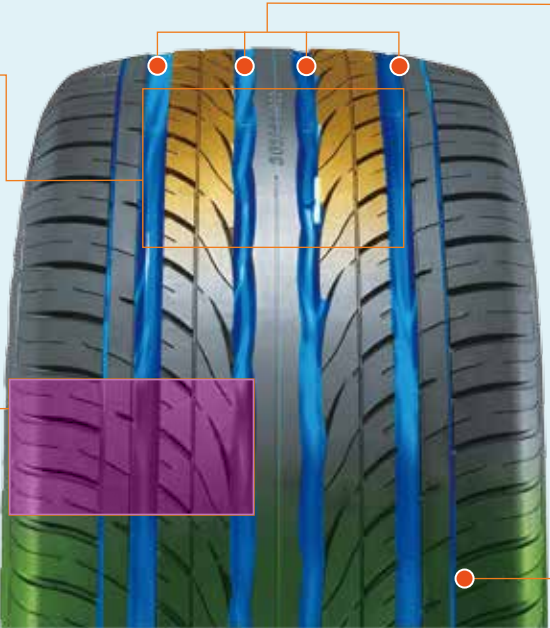

4+4 circumferential grooves

for excellent water drainage in wet conditions.

Silica tread compound

for better grip performance on both dry and wet surface.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
245/30ZR22	92W	XL	8.5J	707	248	8.5	630	340	420/A/A
245/35ZR22	97W	XL	8.5J	731	248	8.5	730	340	420/A/A
245/40ZR22	101W	XL	8.5J	755	248	8.5	825	340	420/A/A
265/35ZR22	102W	XL	9.5J	745	271	8.5	850	340	420/A/A
295/25ZR22	97Y	XL	10.5J	707	301	8.5	730	340	420/A/A
295/30ZR22	103Y	XL	10.5J	737	301	8.5	875	340	420/A/A
305/40ZR22	114W	XL	11J	803	313	8.5	1180	340	420/A/A
305/45ZR22	118W	XL	10J	833	303	8.5	1320	340	420/A/A
255/30ZR24	97W	XL	9J	764	260	8.5	730	340	420/A/A
275/25ZR24	96Y	XL	10J	748	283	8.5	710	340	420/A/A
295/35ZR24	110W	XL	10.5J	816	301	8.5	1060	340	420/A/A
305/35ZR24	112W	XL	11J	824	313	8.5	1120	340	420/A/A
275/25ZR26	98W	XL	10J	798	283	8.5	750	340	420/A/A
295/30ZR26	107W	XL	10.5J	838	301	8.5	975	340	420/A/A
305/30ZR26	109W	XL	11J	844	313	8.5	1030	340	420/A/A
295/25ZR28	103Y	XL	10.5J	859	301	8.5	875	340	420/A/A
305/25ZR28	105Y	XL	11J	812	313	8.5	925	340	420/A/A
325/30ZR28	115Y	XL	11.5	729	331	8.5	1215	340	420/A/A

CF700
UHP



M+S
Rim Diameter:
17-20

Aspect Ratio:
45s-30s

Speed Rating:
W

CF700




Features and Benefits

Asymmetric Tread Design

Inside for good water drainage. Outside for good riding stability and precise handling.

Various sipings

on the tread and variable pitch on the shoulder blocks minimize noise level.

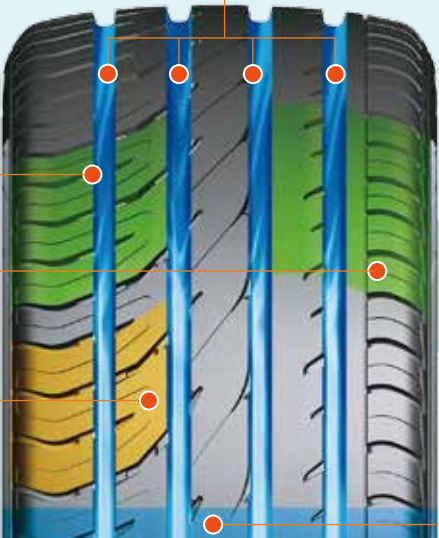

4 circumferential straight grooves

for excellent water drainage and minimizes risk of aquaplaning at high speed.

Outside




Silica tread compound

for lower rolling resistance and excellent road holding.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
195/40ZR17	81W	XL	7.0	588	200	8.0	462	350	380 A A
205/40ZR17	84W	XL	7.5	596	212	8.5	500	350	380 A A
205/45ZR17	88W	XL	7.0	616	206	8.2	560	350	380 A A
215/40ZR17	87W	XL	7.5	604	218	8.5	545	350	380 A A
215/45ZR17	91W	XL	7.0	626	213	8.2	615	350	380 A A
225/45ZR17	94W	XL	7.5	634	225	8.5	670	350	380 A A
235/45ZR17	97W	XL	8.0	644	236	8.5	730	350	380 A A
245/40ZR17	95W	XL	8.5	628	248	8.5	690	350	380 A A
215/35ZR18	84W	XL	7.5	607	218	8.5	500	350	380 A A
225/40ZR18	92W	XL	8.0	637	230	8.5	630	350	380 A A
235/40ZR18	95W	XL	8.5	645	241	8.5	690	350	380 A A
245/45ZR18	100W	XL	8.0	677	243	8.5	800	350	380 A A
235/35ZR19	91W	XL	8.5	647	241	8.5	615	350	380 A A
245/45ZR19	102W	XI	8.0	703	243	8.5	850	350	380 A A
255/40ZR19	100W	XL	9.0	687	260	8.5	800	350	380 A A
275/40ZR19	105W	XL	9.5	703	278	8.5	925	350	380 A A
225/30ZR20	85W	XL	8.0	644	230	8.5	515	350	380 A A
225/35ZR20	90W	XL	8.0	666	230	8.5	600	350	380 A A
245/35ZR20	95W	XL	8.5	680	248	8.5	690	350	380 A A
245/40ZR20	99W	XL	8.5	704	248	8.5	775	350	380 A A
275/35ZR20	102W	XL	9.5	700	278	8.5	850	350	380 A A

CF510 HP



M+S
Rim Diameter:
13-16

Aspect Ratio:
80s-50s

Speed Rating:
T/H/V/W


CF510



Features and Benefits

4 wide longitudinal grooves
provide rapid water drainage and ensure the safety on wet roads.

Variable pitch and Optimized lateral Groove angles
efficiently reduce the riding noise.

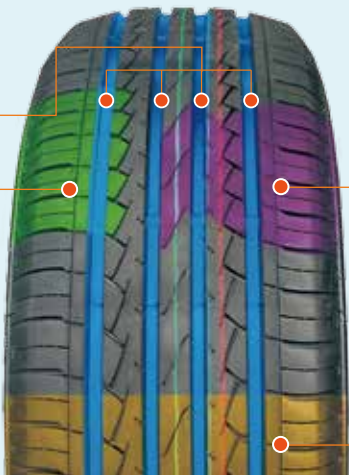


Optimized ground Contact shape
reduces the rolling resistance and enhances the riding stability.

Silica tread compound
with high percentage of silica enhances the grip performance on the wet surface.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
155/80R13	79T	Std	4.5J	578	157	8.0	437	300	440/A/A
165/65R13	77T	Std	5J	544	170	8.0	412	300	440/A/A
175/60R13	77H	Std	5J	540	177	8.2	412	300	440/A/A
185/70R13	86H	Std	5.5J	590	189	8.0	530	300	440/A/A
185/60R14	82H	Std	5.5J	578	189	8.2	475	300	440/A/A
185/65R14	86H	Std	5.5J	596	189	8.2	530	300	440/A/A
185/70R14	88H	Std	5.5J	616	189	8.0	560	300	440/A/A
195/60R14	86H	Std	6J	590	201	8.2	530	300	440/A/A
195/65R14	89H	Std	6J	610	201	8.2	580	300	440/A/A
195/70R14	91H	Std	6J	630	201	8.0	615	300	440/A/A
205/60R14	88H	Std	6J	602	209	8.2	560	300	440/A/A
205/70R14	95H	Std	6J	644	209	8.2	690	300	440/A/A
215/70R14	96H	Std	6.5J	658	221	8.2	710	300	440/A/A
185/55R15	82V	Std	6J	585	194	8.0	475	300	440/A/A
185/60R15	84H	Std	5.5J	603	189	8.2	500	300	440/A/A
185/65R15	88H	Std	5.5J	621	189	8.2	560	300	440/A/A
195/50R15	82V	Std	6J	577	201	8.0	475	300	440/A/A
195/55R15	85V	Std	6J	595	201	8.2	515	300	440/A/A
195/60R15	88H/88V	Std	6J	615	201	8.2	560	300	440/A/A
195/65R15	91H/91V	Std	6J	635	201	8.2	615	300	440/A/A
195/65R15	95H	XL	6J	635	201	8.2	690	340	440/A/A
205/50R15	86V	Std	6.5J	587	214	8.2	530	300	440/A/A
205/55R15	88V	Std	6.5J	607	214	8.2	560	300	440/A/A
205/60R15	91V	Std	6J	627	209	8.2	615	300	440/A/A
205/65R15	94H	Std	6J	647	209	8.2	670	300	440/A/A
205/70R15	96H	Std	6J	669	209	8.2	710	300	440/A/A
215/60R15	94H	Std	6.5J	639	221	8.2	670	300	440/A/A
215/65R15	96H	Std	6.5J	661	221	8.2	710	300	440/A/A
215/70R15	98H	Std	6.5J	683	221	8.2	750	300	440/A/A
225/60R15	96V	Std	6.5J	651	228	8.2	710	300	440/A/A
235/60R15	98H	Std	7J	663	240	8.2	750	300	440/A/A
195/55R16	87V	Std	6J	620	201	8.2	545	300	440/A/A
195/60R16	89H	Std	6J	640	201	8.2	580	300	440/A/A
205/55R16	91V/91W	Std	6.5J	632	214	8.2	615	300	440/A/A
205/55R16	94W	XL	6.5J	632	214	8.2	670	340	440/A/A
205/60R16	92V	Std	6J	652	209	8.2	630	300	440/A/A
215/60R16	99V	XL	6.5J	664	221	8.2	775	340	440/A/A
225/60R16	98H	Std	6.5J	676	228	8.2	750	300	440/A/A
235/60R16	100H	Std	7J	688	240	8.2	800	300	440/A/A

CF620 HP



M+S

Rim Diameter:
13-16

Aspect Ratio:
80s-55s

Speed Rating:
V/H/T


CF620



Features and Benefits

3 wide straight grooves are designed for excellent water evacuation.

Deeper and wider tread design for excellent riding stability, which ensures the safety and high mileage.

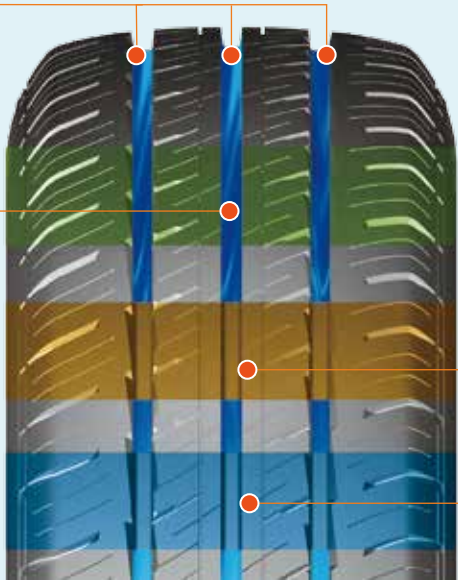


Unique tread are adopted for high mileage.

Special compound are adopted for excellent wear performance.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
155/65R13	73T	Std	4.5	532	157	8.5	365	300	600 A A
155/80R13	79T	Std	4.5	578	157	7.9	437	300	600 A A
165/65R13	77T	Std	5.0	544	170	8.5	412	300	600 A A
165/70R13	79T	Std	5.0	562	170	8.5	437	300	600 A A
175/70R13	82H	Std	5.0	576	177	7.8	475	300	600 A A
185/70R13	86T	Std	5.5	590	189	9.0	530	300	600 A A
165/70R14	81T	Std	5.0	588	170	8.5	462	300	600 A A
165/80R14	85T	Std	4.5	620	165	8.0	515	300	600 A A
175/65R14	82H	Std	5.0	584	177	8.5	475	300	600 A A
175/70R14	84H	Std	5.0	602	177	8.5	500	300	600 A A
185/60R14	82H	Std	5.5	578	189	9.0	475	300	600 A A
185/65R14	86H	Std	5.5	596	189	9.0	530	300	600 A A
185/70R14	88H	Std	5.5	616	189	9.0	560	300	600 A A
195/60R14	86H	Std	6.0	590	201	9.0	530	300	600 A A
185/60R15	84H	Std	5.5	603	189	9.0	500	300	600 A A
185/65R15	88H	Std	5.5	621	189	9.0	560	300	600 A A
195/55R15	85V	Std	6.0	595	201	9.0	515	300	600 A A
195/60R15	88H	Std	6.0	615	201	9.0	560	300	600 A A
195/65R15	91H	Std	6.0	635	201	9.0	615	300	600 A A
205/60R15	91H	Std	6.0	627	209	9.0	615	300	600 A A
205/65R15	94H	Std	6.0	647	209	9.0	670	300	600 A A
205/55R16	94V	XL	6.5	632	214	9.0	670	340	600 A A
205/60R16	92H	Std	6.0	652	209	9.0	630	300	600 A A
205/65R16	95H	Std	6.0	672	209	9.0	690	300	600 A A
215/60R16	95H	Std	6.5	664	221	9.0	690	300	600 A A

CF610 HP



M+S

Rim Diameter:
13-15

Aspect Ratio:
70s-55s

Speed Rating:
V/H/T

CF610



Features and Benefits

3 Wide longitudinal grooves
for excellent water evacuation and reduces aquaplaning at high speed.



Variable pitch and optimized lateral grooves
efficiently reduce the riding noise for a more comfortable driving.




Optimized ground contact shape
reduces the rolling resistance and enhances the riding stability.

Compound formula
with high percentage of SILICA enhances the grip performance on the wet surface.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
165/65R13	77T	Std	5	544	170	7.8	412	300	440/A/A
165/70R13	79T	Std	5	562	170	7.8	437	300	440/A/A
175/70R13	82T	Std	5	576	177	7.8	475	300	440/A/A
165/55R14	72H	Std	5	538	170	7.8	355	300	440/A/A
165/70R14	81H	Std	5	588	170	7.8	462	300	440/A/A
175/65R14	82H	Std	5	584	177	7.8	475	300	440/A/A
175/65R14	86T	XL	5	584	177	7.8	530	340	440/A/A
175/70R14	84H	Std	5	602	177	7.8	500	300	440/A/A
165/55R15	75V	Std	5	563	170	7.8	387	300	440/A/A
165/60R15	77H	Std	5	579	170	7.8	412	300	440/A/A
175/65R15	84H	Std	5	609	177	7.8	500	300	440/A/A

Sports K4

HP



M+S

Rim Diameter:
14-16

Aspect Ratio:
75s-40s

Speed Rating:
V/H/T

Sports K4



Features and Benefits

Concise and fluent lines are showing the flexible and artistic pattern.

New-type environmental protection compound are adopted to lower the rolling resistance, and reduce the fuel consumption.



3 straight main grooves and serial rib are for excellent riding stability under both dry and wet road conditions.

Optimized pitch arrangement minimizes the noise level.

Size	LI/SS	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
			OD	SW	NSD			
155/65R14	75T	4.5	558	157	7.2	387	300	380 A A
165/55R14	72V	5.0	538	170	6.8	355	300	380 A A
165/60R14	75H	5.0	554	170	7.2	387	300	380 A A
165/65R14	79S	5.0	570	170	7.2	437	300	380 A A
185/75R14	89H	5.0	634	184	7.3	580	300	380 A A
155/60R15	74H	4.5	567	157	7.2	375	300	380 A A
165/45R15	68V	5.5	529	165	6.8	315	300	380 A A
165/50R15	73V	5.0	547	170	6.8	365	300	380 A A
165/55R15	75V	5.0	563	170	6.8	387	300	380 A A
165/60R15	77H	5.0	579	170	6.8	412	300	380 A A
165/65R15	81H	5.0	595	170	7.2	462	300	380 A A
175/55R15	77V	5.5	573	182	7.2	412	300	380 A A
175/60R15	81H	5.0	591	177	7.1	462	300	380 A A
165/40R16	73V XL	6.0	538	170	6.8	365	340	380 A A
165/45R16	74V XL	5.5	554	165	6.8	375	340	380 A A
165/50R16	75V	5.0	572	170	6.8	387	300	380 A A

CF300
Commercial/VAN

- Economy
- Handling
- Wet Traction
- Comfort
- High Mileage



Rim Diameter:
14-16

Aspect Ratio:
75s-65s

Speed Rating:
T/R/Q


CF300

Applicable models

Features and Benefits

Wider tread
for more mileage and stable handling.

Stone ejectors
in main shoulder grooves for minimizing casing damage.

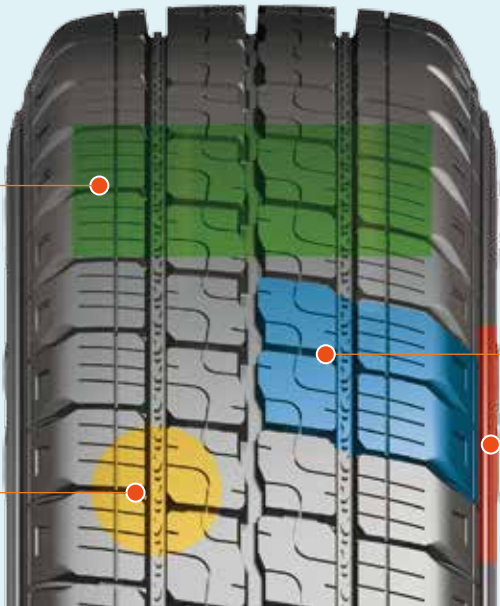

Sipes
on the center ribs and shoulder ribs provide excellent gripping on both dry and wet road conditions.

Shoulder protectors
protect tire sidewall in rough road conditions.



Sidewall	Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)
					OD	SW	NSD	Single	Dual	
BSW	185R14C	102/100Q	8PR	5.5	650	188	8.8	850	800	450
WSW	185R14C	102/100Q	8PR	5.5	650	188	8.8	850	800	450
BSW	195R14C	106/104Q	8PR	5.5	666	198	8.8	950	900	450
WSW	195R14C	106/104Q	8PR	5.5	666	198	8.8	950	900	450
	205R14C	107/105R	8PR	6.0	686	208	10.8	975	925	450
BSW	195R15C	106/104R	8PR	5.5	693	196	8.8	950	900	450
WSW	195R15C	106/104R	8PR	5.5	693	196	8.8	950	900	450
WSW	205/75R14C	109/107R	8PR	5.5	664	203	10.3	1030	975	475
	195/70R15C	104/102R	8PR	6.0	655	201	8.8	900	850	450
WSW	205/70R15C	106/104R	8PR	6.0	669	209	8.8	950	900	450
WSW	205/75R15C	110/108R	8PR	5.5	689	203	10.3	1060	1000	475
	215/70R15C	109/107R	8PR	6.5	683	221	8.8	1030	975	450
	225/70R15C	112/110R	8PR	6.5	697	228	8.8	1120	1060	450
	185/75R16C	104/102R	8PR	5.0	684	184	9.3	900	850	475
	195/65R16C	104/102R	8PR	6.0	660	201	10.3	900	850	475
	195/75R16C	107/105R	8PR	5.5	698	196	8.8	975	925	475
	205/65R16C	107/105T	8PR	6.0	672	209	10.3	975	925	475
BSW	205/75R16C	110/108R	8PR	5.5	714	203	10.3	1060	1000	475
	215/65R16C	109/107T	8PR	6.5	686	221	10.3	1030	975	475
	225/65R16C	112/110T	8PR	6.5	698	228	10.3	1120	1060	475
	225/75R16C	121/120R	10PR	6.0	744	223	8.8	1450	1400	575
	235/65R16C	115/113T	8PR	7.0	712	240	10.3	1215	1150	475

CF350

Commercial/VAN



M+S
Rim Diameter:
13-17

Aspect Ratio:
85s-60s

Speed Rating:
S/T/R/Q

CF350




Features and Benefits

3 zigzag longitudinal grooves

for excellent water evacuation and improve tire flexibility.

Special structure design

greatly improves the loading capacity.

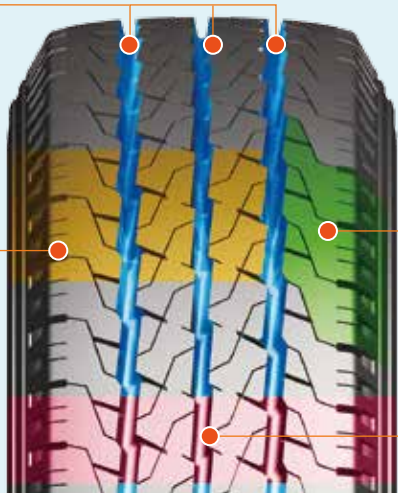

Intensive sipes are designed

to minimize the noise level, and enhance heat dispersion performance, which will greatly ensure the driving safety.

Deeper and wider tread design

for excellent riding stability, which ensures the safety and high mileage.

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)
				OD	SW	NSD	Single	Dual	
155R13C	90/88S	8PR	4.5	578	157	10.0	600	560	450
165R13C	94/93S	8PR	4.5	594	165	10.0	670	650	450
175R13C	97/95S	8PR	5.0	610	177	10.0	730	690	450
165R14C	96/95S	8PR	4.5	620	165	10.0	710	690	450
185R14C	102/100Q	8PR	5.5	650	188	9.0	850	800	450
195R14C	106/104Q	8PR	5.5	666	198	9.0	950	900	450
195R15C	106/104R	8PR	5.5	693	198	9.0	950	900	450
165/70R13C	88/86S	6PR	5.0	562	170	10.0	560	530	375
165/70R14C	84/80S	6PR	5.0	588	170	10.0	500	450	350
175/65R14C	90/88T	6PR	5.0	584	177	10.0	600	560	375
175/70R14C	98/96S	8PR	5.0	602	177	10.0	750	710	450
185/70R14C	102/100S	8PR	5.5	616	189	10.0	850	800	450
195/70R15C	104/102R	8PR	6.0	655	201	9.0	900	850	450
205/65R15C	102/100T	6PR	6.0	647	209	9.0	850	800	375
215/65R15C	104/102T	6PR	6.5	661	221	9.0	900	850	375
175/75R16C	101/99R	8PR	5.0	668	177	9.0	825	775	475
185/75R16C	104/102R	8PR	5.0	684	184	9.0	900	850	475
195/65R16C	104/102R	8PR	6.0	660	201	9.0	900	850	475
215/60R16C	108/106T	8PR	6.5	664	221	9.0	1000	950	475
215/75R16C	116/114S	10PR	6.0	728	216	9.0	1250	1180	525
235/65R16C	115/113R	8PR	7.0	712	240	9.0	1215	1150	475
215/60R17C	109/107T	8PR	6.5	690	221	9.0	1030	975	475
235/60R17C	117/115T	10PR	7.0	714	240	9.0	1285	1215	525
LT185/85R16	111/109L	12PR	5.0	684	184	10.5	1090	1030	690

THRUSTER

Off-Road Competition



M+S
Rim Diameter:
15-16
Speed Rating:
N/L

THRUSTER



Features and Benefits

COC China Off-road
Championship

Anti pressure,
cutting resistance,
durability



Widen flat pattern
block with depth groove
having stronger pressure
resistance and better
drainage and mud shed-
ding ability

Jig-saw tread
pattern
helps to improve tire's
gripping and driving
performance

Size	LI/SS
31×10.50-15LT	107N
▲ 31×10.50-16LT	109N
▲ 32×10.50-16LT	110N
33×10.50-16LT	114L
35×10.50-16LT	119L

CF930

Winter HP

- Winter
- Silence
- Comfort
- Wet Traction
- Silica



M+S

Rim Diameter:
13-17

Aspect Ratio:
70s-50s

Speed Rating:
T/H


CF930

Applicable models

Features and Benefits

Special Y-style directional pattern design
will be excellent to improve the handling stability in ice-snow road conditions.

Open grooves
for effective water evacuation, greatly reduce the hydroplaning, and ensure the safety on ice-snow road.

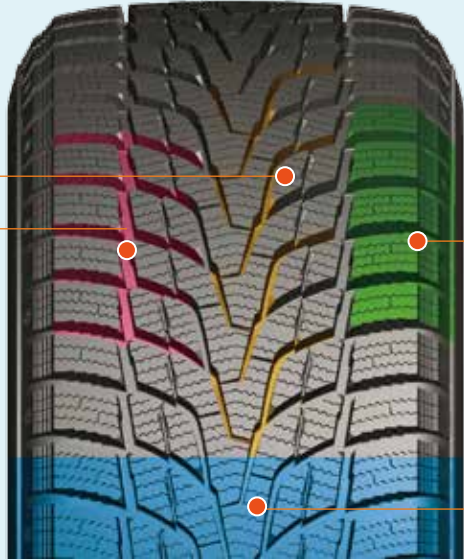

High density 3D sipes on the tread pattern
ensure the general rigidity of the tread, improve the adhesive power between wheel and the ice-snow ground, and strengthen the holding ability.

Advanced silica compound
enhances the traction and balance in winter driving conditions.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)
				OD	SW	NSD		
165/70R13	79T	Std	5.0	562	170	8.4	437	300
165/70R14	81T	Std	5.0	588	170	8.4	462	300
175/65R14	82T	Std	5.0	584	177	8.4	475	300
175/70R14	88T	XL	5.0	602	177	8.4	560	340
185/60R14	82T	Std	5.5	578	189	8.5	475	300
185/65R14	86T	Std	5.5	596	189	8.5	530	300
185/70R14	88T	Std	5.5	616	189	8.5	560	300
175/65R15	84T	Std	5.0	609	177	8.4	500	300
185/60R15	88H	XL	5.5	603	189	8.5	560	340
185/65R15	88T	Std	5.5	621	189	8.5	560	300
195/50R15	82H	Std	6.0	577	201	8.7	475	300
195/55R15	85H	Std	6.0	595	201	8.7	515	300
195/60R15	88H	Std	6.0	615	201	8.7	560	300
195/65R15	91T	Std	6.0	635	201	8.7	615	300
205/65R15	94T	Std	6.0	647	209	8.7	670	300
195/55R16	91H	XL	6.0	620	201	8.7	615	340
205/55R16	91T	Std	6.5	632	214	9.0	615	300
205/60R16	96H	XL	6.0	652	209	8.7	710	340
215/55R16	97H	XL	7.0	642	226	8.7	730	340
215/60R16	99H	XL	6.5	664	221	8.7	775	340
225/55R16	99H	XL	7.0	654	233	8.7	775	340
205/50R17	93H	XL	6.5	638	214	8.7	650	340
215/55R17	98H	XL	7.0	668	226	8.7	750	340
225/50R17	98H	XL	7.0	658	233	8.7	750	340
225/55R17	101H	XL	7.0	680	233	8.7	825	340

CF960
Winter SUV/UHP



M+S 
Rim Diameter:
15-22

Aspect Ratio:
75s-35s

Speed Rating:
T/H/V

CF960



Features and Benefits

Asymmetric tread design

provides balanced performance for different driving conditions.

Well-designed footprint

for excellent handling ability in both ice-snow and dry-wet road conditions.



High density 3D sipes

ensure the general rigidity of the tread,improve the adhesive power between wheel and the ice-snow ground,and strengthen the holding ability.

Advanced silica compound

keeps rubber flexible for maximum performance in extreme cold temperatures in winter.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)
				OD	SW	NSD		
215/75R15	100T	Std	6J	703	216	11.5	800	300
235/70R16	106T	Std	7J	736	240	11.5	950	300
215/50R17	91H	Std	7J	648	226	9.5	615	300
235/45R17	97V	XL	8J	644	236	9.5	730	340
235/55R17	103H	XL	7 1/2J	690	245	11.5	875	340
245/75R17	112T	Std	7J	800	248	11.5	1120	300
285/70R17	117T	Std	8 1/2J	832	292	11.5	1285	300
215/55R18	99H	XL	7J	693	226	11.5	775	340
225/45R18	95H	XL	7 1/2J	659	225	9.5	690	340
235/50R18	101V	XL	7 1/2J	693	245	11.5	825	340
235/55R18	104H	XL	7 1/2J	715	245	11.5	900	340
235/65R18	106T	Std	7J	763	240	11.5	950	300
245/50R18	104V	XL	7 1/2J	703	253	9.5	900	340
255/40R18	99V	XL	9J	661	260	9.5	775	340
255/45R18	103V	XL	8 1/2J	687	255	9.5	875	340
265/60R18	110T	Std	8J	775	272	11.5	1060	300
275/45R18	107V	XL	9J	705	273	9.5	975	340
285/60R18	116T	Std	8 1/2J	799	292	11.5	1250	300
225/45R19	96H	XL	7 1/2J	685	225	9.5	710	340
235/50R19	103V	XL	7 1/2J	719	245	11.5	875	340
245/45R19	102V	XL	8J	703	243	9.5	850	340
245/55R19	107H	XL	7.5J	753	253	9.5	975	340
255/45R19	104V	XL	8 1/2J	713	255	11.5	900	340
275/40R19	105V	XL	9 1/2J	703	278	9.5	925	340
275/55R19	111H	Std	8 1/2J	785	284	11.5	1090	300
245/40R20	99V	XL	8 1/2J	704	248	9.5	775	340
245/45R20	103V	XL	8J	728	243	11.5	875	340
245/50R20	105V	XL	7.5J	754	253	11.5	925	340
275/35R20	102V	XL	9 1/2J	700	278	9.5	850	340
275/40R20	106V	XL	9 1/2J	728	278	11.5	950	340
275/45R20	110V	XL	9J	756	273	11.5	1060	340
285/50R20	116V	XL	9J	794	297	11.5	1250	340
315/35R20	110V	XL	11J	728	320	11.5	1060	340
275/45R21	110V	XL	9J	781	273	11.5	1060	340
275/50R21	113V	XL	8.5J	809	284	11.5	1150	340
275/40R22	107V	XL	9 1/2J	779	278	11.5	975	340

CF950 Winter SUV



Applicable models   

 Economy  Winter  Wet Traction  Braking  Silica

CF970 Winter Studdable



Applicable models  

 Winter  Studdable  Wet Traction  Braking  Silica

▶ **Product** Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
215/65R16	98H	Std	6.5	686	221	8.7	750	300
215/70R16	100T	Std	6.5	708	221	8.7	800	300
245/70R16	111T	XL	7.0	750	248	9.2	1090	340
215/60R17	96H	Std	6.5	690	221	8.7	710	300
225/45R17	94H	XL	7.5	634	225	9.0	670	340
225/60R17	99H	Std	6.5	702	228	9.0	775	300
225/65R17	106H	XL	6.5	724	228	8.7	950	340
235/60R17	102H	Std	7.0	714	240	9.2	850	300
235/65R17	108H	XL	7.0	738	234	9.5	1000	340
265/65R17	112T	Std	8.0	776	272	9.2	1120	300
225/40R18	92V	XL	8.0	637	230	9.0	630	340
235/60R18	107H	XL	7.0	739	240	9.2	975	340
245/45R18	100V	XL	8.0	677	243	9.2	800	340
255/55R18	109H	XL	8.0	737	265	9.2	1030	340
255/50R19	107V	XL	8.0	739	265	9.2	975	340

▶ **Product** Detail

Size	LI/SS	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
			OD	SW	NSD	Single	Dual	
195/65R15	91T	6.0	635	201	10.2	615	-	300
185/75R16C	104/102R 8PR	5.0	684	184	10.5	900	850	475

CF360 Winter Commercial/VAN

Quality Insurance



Applicable models



Winter



Braking



Wet Traction



High Mileage



Silica

Product Detail

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
185R14C	102/100R	8PR	5.5	650	188	10.0	850	800	450
215/75R14C	112/110R	8PR	6.0	678	216	10.0	1120	1060	475
195/70R15C	104/102R	8PR	6.0	655	201	9.5	900	850	450
215/70R15C	109/107R	8PR	6.5	683	221	9.5	1030	975	450
225/70R15C	112/110R	8PR	6.5	697	228	9.5	1120	1060	450
185/75R16C	104/102R	8PR	5.0	684	184	9.0	900	850	475
195/65R16C	104/102R	8PR	6.0	660	201	9.5	900	850	475
195/75R16C	107/105R	8PR	5.5	698	196	9.5	975	925	475
205/65R16C	107/105R	8PR	6.0	672	209	9.5	975	925	475
215/65R16C	109/107R	8PR	6.5	686	221	9.5	1030	975	475
235/65R16C	115/113R	8PR	7.0	712	240	9.5	1215	1150	475

SPECIFICATION TAG & MARKING METHOD

TAG detail

Tire Brand Comforser

245 / 45 ZR 18 100 W

Specification 245/45ZR18 100W

Series CF700

245 Section Width	ZR means Speed Over 240km/h Maximum 270km/h	100 Load Index W Speed Symbol
45 Aspect Ratio		18 RIM (inch)

Speed

Speed symbol indicates the maximum travel speed That the tire can achieve under stated condition.

SS	Maximum Speed (km/h)
P	150
Q	160
S	180
T	190
H	210
V	240
W	270
Y	300
★ ZR	over 240km / h

- ★ ZR means a certain range of speed
- Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

Loading Index

Load index refers to numeral value of tire's maximum load ability under stated condition.

LI	loading capacity	LI	loading capacity	LI	loading capacity	LI	loading capacity
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						

SAFE&ECO DRIVING

- ▶ **Safety Driving**
Please obey the traffic laws and regulations, keep cautious and respect the other drivers and pedestrians.
- ▶ **Eco Driving**
The idea of "Green and Environment" is always recommended, and the advice below will save maintenance costs, extend service life of tire and save fuel.

TIRE USAGE

- ▶ **Tire Maintenance**
For the sake of safety, you should check the tire air-pressure regularly at least once a month. Be cautious about the damage and uneven wear, positioning, balance or suspension failure will affect overall tire performance and cause danger. Tire is the only contact part between vehicles and ground, and it should be in a good condition always.
- ▶ Check the tire pressure regularly, especially before long time driving. If tire is incorrectly inflated, it will lead to increase of rolling resistance and extra fuel consumption.
- ▶ Faster driving speed will result in greater air resistance so as to increase fuel consumption.
- ▶ Keep smooth driving will avoid abrupt acceleration and sudden braking.
- ▶ Convert to higher gear as soon as possible to prevent the engine running fast at lower gear.
- ▶ Use air conditioner properly. If you don't need it, turn off all electrical equipment, for example the electrically heated rear window.
- ▶ Get ready for starting the engine. Switch off the engine if you predict the car will park longer than a few minutes.
- ▶ Check the wheel positioning and wheel camber angle by professional tire maintenance personnel regularly, and make sure that the car running smoothly and stably, which is a important factor for fuel saving.
- ▶ If you have a spare tire check air-pressure, too.

Tire Rotation

Tire rotation is a simple and effective way to prolong tire service life through balancing degree of wear.

