

2021-2022 TIRE PRODUCT SERIES

WHEREVER YOU GO, ENJOY THE DRIVING WITH ROADCRUZA.



- ❖ www.volgatire.com
- ❖ Ankara, Turkey
- ❖ +90 532 3453584 / +90 531 0132775
- ❖ info@volgatire.com

RUN-FLAT SERIES



RA1100

A/T



RA710

UHP

[illegible]

HP SERIES



RA720

UHP



245/30ZR22
245/35ZR22
245/40ZR22
265/35ZR22
295/25ZR22
295/30ZR22
305/40ZR22
305/45ZR22
255/30ZR24
275/25ZR24
295/35ZR24
305/35ZR24
275/25ZR26
295/30ZR26
305/30ZR26
295/25ZR28
305/25ZR28
325/30ZR28

18 Sizes

Page:23-24



SPORTS V1

HP



165/65R13
165/70R13
175/70R13
165/55R14
165/70R14
175/65R14
175/70R14
165/55R15
165/60R15
175/65R15

155/65R14
165/55R14
165/60R14
165/65R14
185/75R14
155/60R15
165/45R15
165/50R15
165/55R15
165/60R15
165/65R15
175/55R15
175/60R15
165/40R16
165/45R16
165/50R16

16 Sizes

Page: 29-30

RA3200 M/T



OPEN BLOCK DISTRIBUTION:

For efficient self-cleaning, especially in mud and dirt condition.

SIDEWALL DESIGN

Designed for protecting sidewall and beautiful decoration.

TREAD DESIGN

Coupled shoulder blocks and center blocks provide excellent performance on/off road condition.

DURABLE COMPOUND

Adopted special compounds for longer mileage and adding cutting resistance on unpaved roads.

M+S M/T: MUD TERRAIN

PRODUCT PERFORMANCE 8.90


HANDLING	
SILENCE	
ON ROAD & OFF ROAD	
WET TRACTION	
WEAR RESISTANCE	

Rim Diameter ∨	Aspect Ratio ∨	Speed Rating ∨
15-26	85s-55s	P/Q



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
LT205/70R15	96/93Q	6PR	6J	875	209	14	710	650	350
LT215/75R15	100/97Q	6PR	6J	709	216	14	800	730	350
LT235/75R15	104/101Q	6PR	6 1/2J	739	235	14	900	825	350
LT265/70R16	121/118Q	10PR	8J	784	272	15	1450	1320	450
LT305/70R16	118/115Q	8PR	9J	840	311	15	1320	1215	350
LT225/75R16	115/112Q	10PR	6J	750	223	15	1215	1120	550
LT245/75R16	120/116Q	10PR	7J	780	248	15	1380	1260	550
LT265/75R16	119/116Q	8PR	7 1/2J	810	267	15	1360	1250	450
LT265/75R16	123/120Q	10PR	7 1/2J	810	267	15	1550	1400	550
LT285/75R16	116/113Q	6PR	8J	840	286	15	1250	1150	350
LT285/75R16	126/123Q	10PR	8J	840	286	15	1700	1550	550
LT315/75R16	121/118Q	8PR	8 1/2J	884	313	15	1450	1320	350
LT315/75R16	127/124Q	10PR	8 1/2J	884	313	15	1750	1600	450
LT215/85R16	115/112Q	10PR	6J	778	216	16	1215	1120	550
LT235/85R16	120/116Q	10PR	6 1/2J	812	235	15	1380	1260	550
LT265/65R17	120/117Q	10PR	8J	782	272	15	1400	1285	450
LT265/70R17	121/118Q	10PR	8J	810	272	15	1450	1320	550
LT285/70R17	121/118Q	8PR	8 1/2J	838	292	15	1450	1320	450
LT275/65R18	119/116Q	8PR	8J	821	279	14	1360	1250	450
LT285/65R18	121/118Q	8PR	8 1/2J	833	292	15	1450	1320	450
LT275/55R20	120/117Q	10PR	8 1/2J	816	284	15	1400	1285	550
LT285/55R20	117/114Q	8PR	9J	828	297	15	1285	1180	450
31×10.50R15LT	109Q	6PR	8 1/2J	781	268	15	1030	—	350
32×11.50R15LT	113Q	6PR	9J	807	290	15	1150	—	350
33×12.50R15LT	108Q	6PR	10J	832	318	15	1000	—	250
35×12.50R15LT	113Q	6PR	10J	883	318	16	1150	—	250
33×12.50R17LT	114Q	8PR	10J	832	318	15	1180	—	350
35×12.50R17LT	121Q	10PR	10J	883	318	16	1450	—	450
37×12.50R17LT	116Q/124Q	6PR/8PR	10J	934	318	16	—	—	250/350
33×12.50R18LT	118Q	10PR	10J	832	318	15	1320	—	450
35×12.50R18LT	118Q	8PR	10J	883	318	16	1320	—	350
33×12.50R20LT	114Q	10PR	10J	832	318	15	1180	—	450
35×12.50R20LT	121Q	10PR	10J	883	318	16	1450	—	450
35×13.50R20LT	121Q/126Q	10PR/12PR	11J	883	345	16	1450/1700	—	450/550
37×13.50R20LT	121Q/130Q	8PR/12PR	11J	934	345	16	1450/1900	—	350/550
33×12.50R22LT	109Q	10PR	10J	832	318	15	1030	—	450
35×12.50R22LT	117Q/121Q	10PR/12PR	10J	883	318	15	1285/1450	—	450
37×13.50R22LT	118Q/128Q	8PR/12PR	11J	934	345	16	1320/1800	—	350/550
33×12.50R24LT	104Q	10PR	10J	832	318	15	900	—	450
35×12.50R24LT	114Q	10PR	10J	883	318	16	1180	—	450
37×13.50R24LT	120Q	10PR	11J	934	345	16	1400	—	450
40×15.50R24LT	128P	10PR	12J	1010	390	16	1800	—	450
37×13.50R26LT	114Q	10PR	11J	934	345	16	1180	—	450
40×15.50R26LT	127P	10PR	12J	1010	390	16	1750	—	450

RA8000 R/T



PROFESSIONAL ROCK CRAWLER TYRE.

STRONG TIRE STRUCTURE

3-ply construction contributes to excellent durability and wear resistance.

ANGULAR TREAD PATTERN

3D angular design provide additional biting edges for more traction.

OPEN SHOULDER BLOCKS

Enhance impact protection and grip in muddy, sandy or snowy off-road conditions.

SPECIAL SIDE-WALL DESIGN

Aesthetic design for distinct look, protects sidewall from cutting and puncture.

M+S R/T: RUGGED TIRE



Rim Diameter

Speed Rating

16-20

Q



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
LT265/75R16	123/120Q	10PR	7 1/2J	810	267	13.6	1550	1400	550/80
LT245/75R17	121/118Q	10PR	7J	800	248	13.6	1450	1320	550/80
LT265/65R17	120/117Q	10PR	8J	782	272	13.6	1400	1285	550/80
LT265/70R17	121/118Q	10PR	8J	810	272	13.6	1450	1320	550/80
LT285/70R17	121/118Q	10PR	8 1/2J	838	292	13.6	1450	1320	550/80
LT235/55R18	109/105Q	10PR	7 1/2J	715	245	13.6	1030	925	550/80
LT265/60R18	119/116Q	10PR	8J	781	272	13.6	1360	1250	550/80
LT265/65R18	122/119Q	10PR	8J	801	272	13.6	1500	1360	550/80
LT265/70R18	124/121Q	10PR	8J	829	272	13.6	1600	1450	550/80
LT285/60R18	122/119Q	10PR	8 1/2J	799	292	13.6	1500	1360	550/80
LT285/65R18	125/122Q	10PR	8 1/2J	827	292	13.6	1650	1500	550/80
LT285/75R18	129/126Q	10PR	8J	885	286	13.6	1850	1700	550/80
LT255/60R19	118/115Q	10PR	7 1/2J	789	260	13.6	1320	1215	550/80
LT265/50R20	115/112Q	10PR	8 1/2J	780	277	13.6	1215	1120	550/80
LT275/55R20	120/117Q	10PR	8 1/2J	810	284	13.6	1400	1285	550/80
LT285/55R20	122/119Q	10PR	9J	822	297	13.6	1500	1360	550/80
35×12.50R17LT	121Q	12PR	10J	883	318	13.6	1450	/	550/80
35×13.50R17LT	121Q	12PR	11J	883	345	13.6	1450	/	550/80
37×12.50R17LT	121Q	12PR	10J	934	318	13.6	1450	/	550/80
37×13.50R17LT	125Q	12PR	11J	934	345	13.6	1650	/	550/80
38×15.50R17LT	125Q	12PR	12 1/2J	959	395	13.6	1650	/	550/80
39×13.50R17LT	125Q	12PR	11J	985	345	13.6	1650	/	550/80
40×13.50R17LT	125Q	12PR	11J	1010	345	13.6	1650	/	550/80
35×12.50R20LT	125Q	12PR	10J	883	318	13.6	1650	/	550/80

RA1100 A/T



DESIGNED FOR ALL TERRAIN

The precise ratio of tire tread improves the traction and handling on mud and rock roads.

WHITE LETTERING

Provides amazing aesthetic perception.

3D BLOCK DESIGN

For reducing tread damage in rough road condition.

SPECIAL COMPOUND

Increased the cutting resistance.

M+S A/T: ALL TERRAIN

PRODUCT PERFORMANCE		9.50
HANDLING		
SILENCE		
HANDLING		
WET TRACTION		
WEAR RESISTANCE		

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
14-24	85s-45s	H/R/S/T	420/A/B



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
				OD	SW	NSD	Single	Dual		
175/80R14	92T XL	—	5	636	177	10.5	630	—	340	420/A/B
205/60R15	91H	—	6	627	209	10.5	615	—	300	420/A/B
205/65R15	94H	—	6	647	209	10.5	670	—	300	420/A/B
205/70R15	96T	—	6	669	209	10.5	710	—	300	420/A/B
215/75R15	100S	—	6	703	216	10.5	790	—	300	420/A/B
P235/75R15	105T	—	6.5	733	235	10.8	920	—	300	420/A/B
205/60R16	92T	—	6	652	209	12.0	630	—	300	420/A/B
215/65R16	102H XL	—	6.5	686	221	10.8	850	—	340	420/A/B
P215/70R16	99T	—	6.5	708	221	10.8	775	—	300	420/A/B
P225/70R16	101T	—	6.5	722	228	10.8	825	—	300	420/A/B
P235/70R16	104S	—	7	736	240	10.8	900	—	300	420/A/B
P245/70R16	106T	—	7	750	248	10.8	950	—	300	420/A/B
P255/70R16	111T	—	7.5	764	260	10.8	1090	—	300	420/A/B
P265/70R16	111T	—	8	778	272	10.8	1090	—	300	420/A/B
P275/70R16	114T	—	8	792	279	10.8	1180	—	300	420/A/B
225/65R17	102T	—	6.5	724	228	10.5	850	—	300	420/A/B
235/65R17	108T XL	—	7	738	240	10.8	1000	—	340	420/A/B
P245/65R17	111T XL	—	7	750	248	10.8	1090	—	340	420/A/B
P265/65R17	112S	—	8	776	272	10.8	1120	—	300	420/A/B
P265/70R17	115T	—	8	804	272	10.8	1215	—	300	420/A/B
235/60R18	103T	—	7	739	240	10.8	875	—	300	420/A/B
235/65R18	106T	—	7	763	240	10.8	950	—	300	420/A/B
245/60R18	105T	—	7	751	248	12.0	925	—	300	420/A/B
265/60R18	114H XL	—	8	775	272	10.8	1180	—	340	420/A/B
265/70R18	116T	—	8	829	272	12.0	1250	—	300	420/A/B
285/60R18	116T	—	8.5	799	292	10.8	1250	—	300	420/A/B
245/55R19	107H XL	—	7.5	753	253	12.0	975	—	340	420/A/B
255/55R19	111H XL	—	8	763	265	12.0	1090	—	340	420/A/B
245/50R20	105H XL	—	7.5	754	253	12.0	925	—	340	420/A/B
265/50R20	107T	—	8.5	774	277	10.8	975	—	300	420/A/B
P275/60R20	115T	—	8	838	279	10.8	1215	—	300	420/A/B
LT205/70R15	96/93S	6PR	6	669	209	10.5	710	650	350	—
LT215/75R15	100/97R	6PR	6	703	216	10.5	800	730	350	—
LT235/75R15	104/101R	6PR	6.5	733	235	13.0	900	825	350	—
LT215/85R16	115/112R	10PR	6	772	216	13.0	1215	1120	550	—
LT225/75R16	115/112R	10PR	6	744	223	13.0	1215	1120	550	—
LT235/70R16	110/107S	8PR	7	736	240	10.8	1060	975	450	—
LT235/85R16	120/116R	10PR	6.5	806	235	13.0	1380	1260	550	—
LT245/70R16	113/110S	8PR	7	750	248	10.8	1150	1060	450	—
LT245/75R16	120/116R	10PR	7	774	248	13.0	1380	1260	550	—



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
				OD	SW	NSD	Single	Dual		
LT265/70R16	121/118R	10PR	8	778	272	13.0	1450	1320	550	—
LT265/75R16	123/120S	10PR	7.5	804	267	13.0	1550	1400	550	—
LT285/75R16	126/123R	10PR	8	834	286	13.0	1700	1550	550	—
LT225/65R17	107/103S	8PR	6.5	724	228	10.5	975	875	450	—
LT235/80R17	120/117R	10PR	6.5	808	235	13.0	1400	1285	550	—
LT245/65R17	111/108S	8PR	7	750	248	10.8	1090	1000	450	—
LT245/70R17	119/116S	10PR	7	776	248	13.0	1360	1250	550	—
LT245/75R17	121/118S	10PR	7	800	248	13.0	1450	1320	550	—
LT265/65R17	120/117S	10PR	8	776	272	10.8	1400	1285	550	—
LT265/70R17	121/118R	10PR	8	804	272	13.0	1450	1320	550	—
LT275/65R17	121/118S	10PR	8	790	279	12.7	1450	1320	550	—
LT275/70R17	121/118S	10PR	8	792	279	12.7	1450	1320	550	—
LT285/65R17	121/118S	10PR	8.5	802	292	13.0	1450	1320	550	—
LT285/70R17	121/118S	10PR	8.5	832	292	13.0	1450	1320	550	—
LT315/70R17	121/118S	10PR	9.5	874	323	13.0	1450	1320	450	—
LT225/55R18	108/105S	8PR	7	705	233	12.7	1000	925	450	—
LT235/60R18	108/104S	8PR	7	739	240	10.8	1000	900	450	—
LT235/65R18	110/107S	8PR	7	763	240	10.8	1060	975	450	—
LT245/60R18	110/107S	8PR	7	751	248	12.0	1060	975	450	—
LT255/60R18	112/108S	8PR	7.5	763	260	12.0	1120	1000	450	—
LT265/60R18	114/110S	8PR	8	775	272	10.8	1180	1060	450	—
LT265/65R18	122/119S	10PR	8	801	272	12.7	1500	1360	550	—
LT265/70R18	124/121S	10PR	8	829	272	12.0	1600	1450	550	—
LT275/65R18	123/120S	10PR	8	815	279	13.0	1550	1400	550	—
LT275/70R18	125/122S	10PR	8	843	279	13.0	1650	1500	550	—
LT285/60R18	118/115S	8PR	8.5	799	292	10.8	1320	1215	450	—
LT285/65R18	125/122S	10PR	8.5	827	292	13.0	1650	1500	550	—
LT235/55R19	111/108S	10PR	7 1/2	741	245	12.7	1090	1000	550	—
LT245/55R19	110/107S	8PR	7.5	753	253	12.0	1060	975	450	—
LT255/50R19	113/110S	10PR	8	739	265	12.7	1150	1060	550	—
LT255/55R19	111/108S	8PR	8	763	265	12.0	1090	1000	450	—
LT275/55R19	119/116S	10PR	8 1/2	785	284	12.7	1360	1250	550	—
LT245/50R20	108/104S	8PR	7.5	754	253	12.0	1000	900	450	—
LT265/50R20	116/113S	8PR	8.5	774	277	10.8	1250	1150	450	—
LT285/50R20	119/116S	10PR	9	794	297	13.0	1360	1250	550	—
LT275/55R20	120/117S	10PR	8.5	810	284	13.0	1400	1285	550	—
LT275/60R20	119/116S	8PR	8	838	279	10.8	1360	1250	450	—
LT275/65R20	126/123S	10PR	8	866	279	13.0	1700	1550	550	—
LT285/55R20	122/119S	10PR	9	822	297	13.0	1500	1360	550	—
LT305/55R20	121/118S	10PR	9.5	844	316	13.0	1450	1320	450	—

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
				OD	SW	NSD	Single	Dual		
LT305/60R20	123/120S	10PR	9	874	311	13.0	1550	1400	450	—
LT275/45R21	113/110S	10PR	9	781	273	12.7	1150	1060	550	—
LT275/50R21	118/115S	10PR	8 1/2	789	284	12.7	1320	1215	550	—
LT285/45R22	117/114S	10PR	9.5	815	285	13.0	1285	1180	550	—
31×10.50R15LT	109S	6PR	8.5	775	268	13.0	1030	—	350	—
33×12.50R17LT	120S	10PR	10	832	318	12.7	1400	—	450	—
35×12.50R17LT	121S	10PR	10	877	318	13.0	1450	—	450	—
33×12.50R18LT	118S	10PR	10	832	318	12.7	1320	—	450	—
35×12.50R18LT	123S	10PR	10	877	318	12.7	1550	—	450	—
33×12.50R20LT	114S	10PR	10	832	318	12.7	1180	—	450	—
35×12.50R20LT	121S	10PR	10	877	318	13.0	1450	—	450	—
33×12.50R22LT	109S	10PR	10	832	318	12.7	1030	—	450	—
35×12.50R22LT	117S	10PR	10	877	318	12.7	1285	—	450	—
33×12.50R24LT	106S	12PR	11 1/2	832	318	12.7	950	—	550	—
35×12.50R24LT	116S	12PR	10 1/2	877	318	12.7	1250	—	550	—



RAZ000 /H/T

- ECONOMY
- HANDLING
- SILENCE
- WET TRACTION
- COMFORT

STRAIGHT RIB DESIGN

For enhancing driving stability and water dispersion.

MOLDED THOUSANDS OF SIPES

For equalizing tread blocks strength and riding comfort.


STRONG STRUCTURE

For stable driving and adding endurance capability.

CLOSED SHOULDER

For reducing shoulder wear and prolong tire mileage.

M+S H/T: HIGHWAY TERRAIN

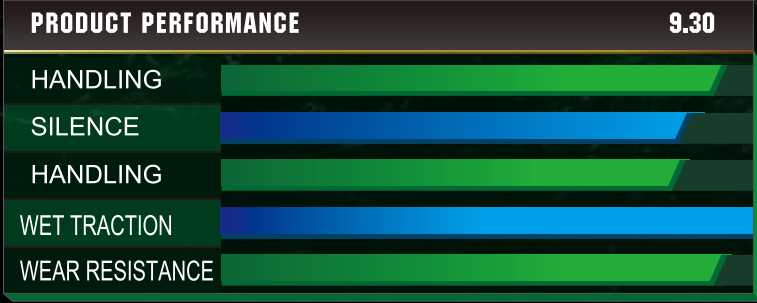

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
15-17	85s-60s	S/H	500/A/A

APPLICABLE MODELS



Size	LI/SS	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
			OD	SW	NSD	Single	Dual		
235/75R15	105H	6 1/2J	733	235	9.5	925	—	300	500/A/A
215/65R16	98H	6.5J	686	221	8.5	750	—	300	500/A/A
215/70R16	100H	6 1/2J	708	221	9.5	800	—	300	500/A/A
225/70R16	103H	6 1/2J	722	228	9.5	875	—	300	500/A/A
235/70R16	106H	7J	736	240	9.5	950	—	300	500/A/A
245/70R16	107H	7J	750	248	9.5	975	—	300	500/A/A
255/70R16	111H	7 1/2 J	764	260	9.5	1090	—	300	500/A/A
265/70R16	112H	8J	778	272	9.5	1120	—	300	500/A/A
235/60R17	106H XL	7J	714	240	9.5	950	—	340	500/A/A
245/65R17	107H	7J	750	248	9.5	975	—	300	500/A/A
245/70R17	110H	7J	776	248	9.5	1060	—	300	500/A/A
265/65R17	112H	8J	776	272	9.5	1120	—	300	500/A/A
265/70R17	115H	8J	804	272	9.5	1215	—	300	500/A/A
LT235/75R15	104/101S 6PR	6 1/2J	733	235	11.0	900	825	350	—
LT215/85R16	115/112S 10PR	6J	772	216	11.0	1215	1120	550	—
LT225/75R16	115/112S 10PR	6J	744	223	11.0	1215	1120	550	—
LT235/85R16	120/116S 10PR	6 1/2J	806	235	11.0	1380	1260	550	—
LT245/75R16	120/116S 10PR	7J	774	248	11.0	1380	1260	550	—
LT265/75R16	123/120S 10PR	7 1/2J	804	267	11.0	1550	1400	550	—
LT245/75R17	121/118S 10PR	7J	800	248	11.0	1450	1320	550	—
LT265/70R17	121/118S 10PR	8 J	804	272	11.0	1450	1320	550	—
31×10.50R15LT	109S 6PR	8 1/2J	775	268	11.0	1030	—	350	—



RA4100

SUV/CLV RFT

- ECONOMY
- HANDLING
- SILENCE
- WET TRACTION
- COMFORT

ASYMMETRIC TREAD DESIGN

For excellent riding comfort and precise handling on wet roads.

VARIOUS SIPINGS AND LATERAL GROOVES

For reducing pattern noise.

4 CIRCUMFERENTIAL GROOVES

For excellent water evacuation, minimizes the risk of aquaplaning.

SILIKA TREAD COMPOUND

For lower rolling resistance and better gripping.

M+S H/L: HIGHWAY LUXURY



Rim Diameter	Aspect Ratio	Speed Rating	UTQG
18-21	60s-35s	H/V/W/Y	320/A/A

APPLICABLE MODELS



SUV/CLV

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
225/55ZR18	102W	XL	7.0J	705	233	8.3	850	340	320/A/A
225/60R18	104H	XL	6.5J	727	228	8.3	900	340	320/A/A
245/50ZR18	104W	XL	7.5J	703	253	8.3	900	340	320/A/A
245/60R18	105V	Std	7.0J	751	248	8.3	925	300	320/A/A
255/55ZR18	109W	XL	8.0J	737	265	8.3	1030	340	320/A/A
255/55ZR19	111W	XL	8.0J	763	265	8.3	1090	340	320/A/A
245/40ZR20	99Y	XL	8.5J	704	248	8.5	775	340	320/A/A
265/50ZR20	111W	XL	8.5J	774	277	8.3	1090	340	320/A/A
275/40R20	106W	XL	9.5J	728	278	8.5	950	340	320/A/A
275/45ZR20	110W	XL	9.0J	756	273	8.5	1060	340	320/A/A
275/55ZR20	117W	XL	8.5J	810	284	8.3	1285	340	320/A/A
285/50ZR20	116W	XL	9.0J	794	297	8.3	1250	340	320/A/A
295/35ZR21	107W	XL	10.5J	739	301	8.3	975	340	320/A/A

RFT

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
245/50RF18	100V	Std	7.5	703	253	8.2	800	300	320/A/A
255/55RF18	105V	Std	8	737	265	8.2	925	300	320/A/A



RA 710 / RFT / LHP



ASYMMETRIC TREAD DESIGN

Outside:
Strong shoulder for smooth turning.
Inside:
Multi-sipes for excellent wet gripping

WIDER CENTER RIB

For driving stability on the straight line road.

3+1 LONGITUDINAL GROOVES

For excellent water drainage in wet conditions.

VARIABLE PITCH DESIGN

For reducing noise and improving gripping on both dry and wet road conditions.

PRODUCT PERFORMANCE		8.70
DRY CONDITION		
WET CONDITION		
COMFORT		
SILENCE		
WEAR RESISTANCE		

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
16-21	55s-35s	V/W/Y	380/A/A

RFT



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
205/55RF16	91V	Std	6.5	632	214	8.2	615	300	380/A/A
225/45RF17	94W	XL	7.5	634	225	8.2	570	340	380/A/A
225/50RF17	98V	XL	7	658	233	8.2	750	350	380/A/A
225/55RF17	101V	XL	7	680	233	8.2	825	350	380/A/A
225/40RF18	92W	XL	8	637	230	8.2	630	340	380/A/A
225/45RF18	95W	XL	7.5	659	225	8.2	690	340	380/A/A
245/40RF18	97V	XL	8.5	653	248	8.2	730	340	380/A/A
245/45RF18	100V	XL	8	677	248	8.2	800	340	380/A/A
255/40RF18	99W	XL	9	661	260	8.2	775	340	380/A/A
235/55RF19	101W	Std	7.5	741	245	8.2	825	300	380/A/A
245/40RF19	98W	XL	8.5	679	248	8.2	750	340	380/A/A
245/45RF19	102W	XL	8	703	243	8.2	850	340	380/A/A
255/50RF19	103W	Std	8	739	265	8.2	875	300	380/A/A
275/35RF19	100W	XL	9.5	675	278	8.2	800	340	380/A/A
275/40RF19	101W	Std	9.5	703	278	8.2	825	300	380/A/A



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
185/50R16	81V	Std	6J	592	194	8.0	462	300	380/A/A
195/45R16	84V	XL	6.5J	582	195	8.0	500	340	380/A/A
195/50R16	84V	Std	6J	602	201	8.0	500	300	380/A/A
205/45R16	83V	Std	7J	590	206	8.0	487	300	380/A/A
205/50R16	87W	Std	6.5J	612	214	8.0	545	300	380/A/A
215/55R16	97W/V	XL	7J	642	226	8.0	730	340	380/A/A
225/55R16	99W	XL	7J	654	233	8.0	775	340	380/A/A
195/40ZR17	81W	XL	7J	588	200	8.2	462	340	380/A/A
205/40ZR17	84W	XL	7.5J	596	212	8.0	500	340	380/A/A
205/45R17	88W	XL	7J	616	206	8.0	560	340	380/A/A
205/50R17	93W	XL	6.5J	638	214	8.0	650	340	380/A/A
205/55R17	95W	XL	6.5J	658	214	8.2	690	340	380/A/A
215/45ZR17	91W	XL	7J	626	213	8.0	615	340	380/A/A
215/50R17	95W	XL	7J	648	226	8.0	690	340	380/A/A
215/55R17	98W	XL	7J	668	226	8.0	750	340	380/A/A
225/45ZR17	94W	XL	7.5J	634	225	8.0	670	340	380/A/A
225/50R17	98W	XL	7J	658	233	8.0	750	340	380/A/A
225/55R17	101W	XL	7J	680	233	8.0	825	340	380/A/A
235/45ZR17	97W	XL	8J	644	236	8.2	730	340	380/A/A
235/50R17	100W	XL	7.5J	668	245	8.2	800	340	380/A/A
235/55R17	103W	XL	7.5J	690	245	8.2	875	340	380/A/A
245/45ZR17	99W	XL	8J	652	243	8.2	775	340	380/A/A
255/45ZR17	102W	XL	8.5J	662	255	8.3	850	340	380/A/A
205/40ZR18	86W	XL	7.5J	621	212	8.0	530	340	380/A/A
215/35ZR18	84W	XL	7.5J	607	218	8.2	500	340	380/A/A
215/40ZR18	89W	XL	7.5J	629	218	8.0	580	340	380/A/A
215/45ZR18	93W	XL	7J	651	213	8.0	650	340	380/A/A
225/40ZR18	92W	XL	8J	637	230	8.0	630	340	380/A/A
225/45ZR18	95W	XL	7.5J	659	225	8.0	690	340	380/A/A
235/40ZR18	95W	XL	8.5J	645	241	8.2	690	340	380/A/A
235/45ZR18	98W	XL	8J	669	236	8.2	750	340	380/A/A
245/40ZR18	97W	XL	8.5J	653	248	8.2	730	340	380/A/A
245/45ZR18	100W	XL	8J	677	243	8.2	800	340	380/A/A
255/40ZR18	99W	XL	9J	661	260	8.5	775	340	380/A/A
255/45ZR18	103W	XL	8.5J	687	255	8.5	875	340	380/A/A
255/35ZR18	94Y	XL	9J	635	260	8.2	670	340	380/A/A



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
225/40ZR19	93W	XL	8J	663	230	8.0	650	340	380/A/A
225/55R19	103W	XL	7J	731	233	8.2	875	340	380/A/A
235/35ZR19	91W	XL	8.5J	647	241	8.2	615	340	380/A/A
235/40ZR19	96W	XL	8.5J	671	241	8.2	710	340	380/A/A
235/55R19	105W	XL	7.5J	741	245	8.2	925	340	380/A/A
245/35ZR19	93W	XL	8.5J	655	248	8.2	650	340	380/A/A
245/40ZR19	98W	XL	8.5J	679	248	8.2	750	340	380/A/A
245/45ZR19	102W	XL	8J	703	243	8.2	850	340	380/A/A
245/55R19	107W	XL	7.5J	753	253	8.2	975	340	380/A/A
255/35ZR19	96Y	XL	9J	661	260	8.2	710	340	380/A/A
255/40ZR19	100Y	XL	9J	687	260	8.2	800	340	380/A/A
255/50R19	107W	XL	8J	739	265	8.2	975	340	380/A/A
275/35ZR19	96Y	Std	9.5	675	278	8.2	710	300	380/A/A
275/40ZR19	105W	XL	9.5J	703	278	8.5	925	340	380/A/A
295/30ZR19	100W	XL	10.5J	661	301	8.5	800	340	380/A/A
225/30ZR20	85W	XL	8J	644	230	8.2	515	340	380/A/A
245/35ZR20	95W	XL	8.5J	680	248	8.2	690	340	380/A/A
255/35ZR20	97W	XL	9J	686	260	8.5	730	340	380/A/A
275/30ZR20	97Y	XL	9.5J	674	278	8.2	730	340	380/A/A
275/45ZR21	110W	XL	9J	781	273	8.2	1060	340	380/A/A
295/40ZR21	111W	XL	10 1/2J	769	301	8.2	1090	340	380/A/A



RA 720 UHP

- HANDLING
- SILENCE
- WET TRACTION
- BRAKING
- SILICA

UNI-DIRECTIONAL TREAD DESIGN

For driving stability and minimizing the risk of aquaplaning.

NEW SHOULDER DESIGN:


Adopted two wide shoulder grooves for stopping shoulder irregular wear and reducing noise level.

4+2 CIRCUMFERENTIAL GROOVES

For excellent water drainage in the wet road conditions.

SILICA COMPOUND

For better gripping on both dry and wet road conditions.

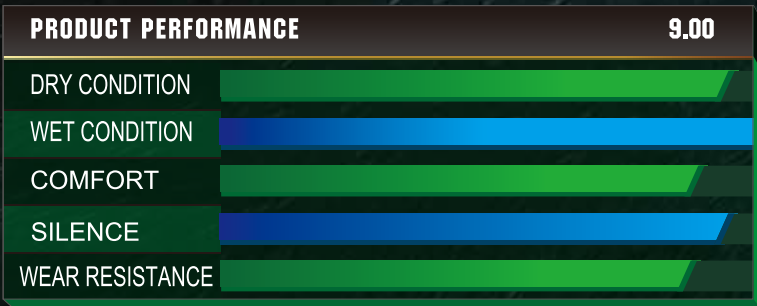

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
22-28	45s -25s	W/Y	420/A/A

APPLICABLE MODELS



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
245/30ZR22	92W	XL	8.5J	707	248	8.5	630	340	420/A/A
245/35ZR22	97W	XL	8.5J	731	248	8.5	730	340	420/A/A
245/40ZR22	101W	XL	8.5J	755	248	8.5	825	340	420/A/A
265/35ZR22	102W	XL	9.5J	745	271	8.5	850	340	420/A/A
295/25ZR22	97Y	XL	10.5J	707	301	8.5	730	340	420/A/A
295/30ZR22	103Y	XL	10.5J	737	301	8.5	875	340	420/A/A
305/40ZR22	114W	XL	11J	803	313	8.5	1180	340	420/A/A
305/45ZR22	118W	XL	10J	833	303	8.5	1320	340	420/A/A
255/30ZR24	97W	XL	9J	764	260	8.5	730	340	420/A/A
275/25ZR24	96Y	XL	10J	748	283	8.5	710	340	420/A/A
295/35ZR24	110W	XL	10.5J	816	301	8.5	1060	340	420/A/A
305/35ZR24	112W	XL	11J	824	313	8.5	1120	340	420/A/A
275/25ZR26	98W	XL	10J	798	283	8.5	750	340	420/A/A
295/30ZR26	107W	XL	10.5J	838	301	8.5	975	340	420/A/A
305/30ZR26	109W	XL	11J	844	313	8.5	1030	340	420/A/A
295/25ZR28	103Y	XL	10.5J	859	301	8.5	875	340	420/A/A
305/25ZR28	105Y	XL	11J	812	313	8.5	925	340	420/A/A
325/30ZR28	115Y	XL	11.5J	729	331	8.5	1215	340	420/A/A

RASIO H/P



4 WIDE LONGITUDINAL GROOVES

For good water drainage and ensure the safety on wet road conditions.

OPTIMIZED ROAD CONTACT SHAPE

For reducing rolling resistance and prolongs mileage.

VARIABLE PITCH AND OPTIMIZED GROOVE ANGLE

For reducing tire noise.

SILICA COMPOUND

For improving gripping on wet road conditions.

PRODUCT PERFORMANCE 8.90



Rim Diameter	Aspect Ratio	Speed Rating	UTQG
13-16	80s-50s	T/H/V/W	440/A/A

APPLICABLE MODELS

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
155/80R13	79T	Std	4.5J	578	157	8.0	437	300	440/A/A
165/65R13	77T	Std	5J	544	170	8.0	412	300	440/A/A
175/60R13	77H	Std	5J	540	177	8.2	412	300	440/A/A
185/70R13	86H	Std	5.5J	590	189	8.0	530	300	440/A/A
185/60R14	82H	Std	5.5J	578	189	8.2	475	300	440/A/A
185/65R14	86H	Std	5.5J	596	189	8.2	530	300	440/A/A
185/70R14	88H	Std	5.5J	616	189	8.0	560	300	440/A/A
195/60R14	86H	Std	6J	590	201	8.2	530	300	440/A/A
195/65R14	89H	Std	6J	610	201	8.2	580	300	440/A/A
195/70R14	91H	Std	6J	630	201	8.0	615	300	440/A/A
205/60R14	88H	Std	6J	602	209	8.2	560	300	440/A/A
205/70R14	95H	Std	6J	644	209	8.2	690	300	440/A/A
215/70R14	96H	Std	6.5J	658	221	8.2	710	300	440/A/A
185/55R15	82V	Std	6J	585	194	8.0	475	300	440/A/A
185/60R15	84H	Std	5.5J	603	189	8.2	500	300	440/A/A
185/65R15	88H	Std	5.5J	621	189	8.2	560	300	440/A/A
195/50R15	82V	Std	6J	577	201	8.0	475	300	440/A/A
195/55R15	85V	Std	6J	595	201	8.2	515	300	440/A/A
195/60R15	88H/V	Std	6J	615	201	8.2	560	300	440/A/A
195/65R15	91H/V	Std	6J	635	201	8.2	615	300	440/A/A
195/65R15	95H	XL	6J	635	201	8.2	690	340	440/A/A
205/50R15	86V	Std	6.5J	587	214	8.2	530	300	440/A/A
205/55R15	88V	Std	6.5J	607	214	8.2	560	300	440/A/A
205/60R15	91V	Std	6J	627	209	8.2	615	300	440/A/A
205/65R15	94H	Std	6J	647	209	8.2	670	300	440/A/A
205/70R15	96H	Std	6J	669	209	8.2	710	300	440/A/A
215/60R15	94H	Std	6.5J	639	221	8.2	670	300	440/A/A
215/65R15	96H	Std	6.5J	661	221	8.2	710	300	440/A/A
215/70R15	98H	Std	6.5J	683	221	8.2	750	300	440/A/A
225/60R15	96V	Std	6.5J	651	228	8.2	710	300	440/A/A
235/60R15	98H	Std	7J	663	240	8.2	750	300	440/A/A
195/55R16	87V	Std	6J	620	201	8.2	545	300	440/A/A
195/60R16	89H	Std	6J	640	201	8.2	580	300	440/A/A
205/55R16	91V/W	Std	6.5J	632	214	8.2	615	300	440/A/A
205/55R16	94W	XL	6.5J	632	214	8.2	670	340	440/A/A
205/60R16	92V	Std	6J	652	209	8.2	630	300	440/A/A
215/60R16	99V	XL	6.5J	664	221	8.2	775	340	440/A/A
225/60R16	98H	Std	6.5J	676	228	8.2	750	300	440/A/A
235/60R16	100H	Std	7J	688	240	8.2	800	300	440/A/A



RAGIO H/P

ECONOMY

SILENCE

COMFORT

WET TRACTION

3 WIDE LONGITUDINAL GROOVES

For good water evacuation, and extended shoulders provide stable cornering and more mileage.

OPTIMIZED ROAD CONTACT SHAPE


For reducing rolling resistance and prolongs mileage.

VARIABLE PITCH AND OPTIMIZED GROOVE ANGLE

For reducing tire noise.

SILICA COMPOUND

For improving gripping on wet road conditions.

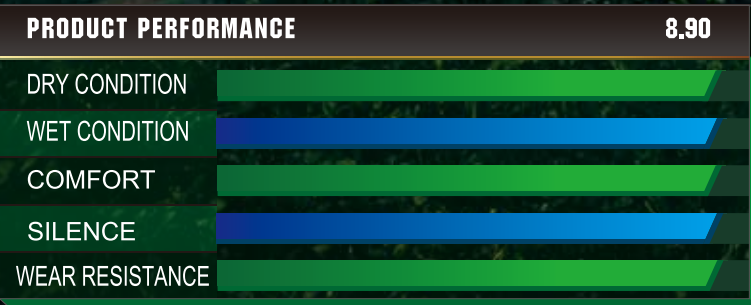

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
13-15	70s-55s	T/H/V	440/A/A

APPLICABLE MODELS

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
165/65R13	77T	Std	5	544	170	7.8	412	300	440/A/A
165/70R13	79T	Std	5	562	170	7.8	437	300	440/A/A
175/70R13	82T	Std	5	576	177	7.8	475	300	440/A/A
165/55R14	72H	Std	5	538	170	7.8	355	300	440/A/A
165/70R14	81H	Std	5	588	170	7.8	462	300	440/A/A
175/65R14	82H	Std	5	584	177	7.8	475	300	440/A/A
175/65R14	86T	XL	5	584	177	7.8	530	340	440/A/A
175/70R14	84H	Std	5	602	177	7.8	500	300	440/A/A
165/55R15	75V	Std	5	563	170	7.8	387	300	440/A/A
165/60R15	77H	Std	5	579	170	7.8	412	300	440/A/A
175/65R15	84H	Std	5	609	177	7.8	500	300	440/A/A

SPORTS V1 H/P



ECONOMY



SILENCE



COMFORT



WET TRACTION

3 STRAIGHT GROOVES WITH SERIAL RIB

For adding more cornering power and wet traction.

OPTIMIZED PITCH ARRANGEMENT

For reducing noise.

VARIOUS LINES

Adopted for improving wet performance and giving attractive view.

TREAD COMPOUND

By considering environment, adopted special compound for giving lower rolling resistance and saving fuel consumption.

PRODUCT PERFORMANCE

8.90

DRY CONDITION

WET CONDITION

COMFORT

SILENCE

WEAR RESISTANCE

Rim Diameter ▾

14-16

Aspect Ratio ▾

75s-40s

Speed Rating ▾

H/S/T/V

APPLICABLE MODELS



Size	LI/SS	Rim	OD	Dimensions (mm) SW	NSD	Max.Load (kg)	Max.Press (kPa)
155/65R14	75T	4.5	558	157	7.2	387	300
165/55R14	72V	5.0	538	170	6.8	355	300
165/60R14	75H	5.0	554	170	7.2	387	300
165/65R14	79S	5.0	570	170	7.2	437	300
185/75R14	89H	5.0	634	184	7.3	580	300
155/60R15	74H	4.5	567	157	7.2	375	300
165/45R15	68V	5.5	529	165	6.8	315	300
165/50R15	73V	5.0	547	170	6.8	365	300
165/55R15	75V	5.0	563	170	6.8	387	300
165/60R15	77H	5.0	579	170	6.8	412	300
165/65R15	81H	5.0	595	170	7.2	462	300
175/55R15	77V	5.5	573	182	7.2	412	300
175/60R15	81H	5.0	591	177	7.1	462	300
165/40R16	73V XL	6.0	538	170	6.8	365	340
165/45R16	74V XL	5.5	554	165	6.8	375	340
165/50R16	75V	5.0	572	170	6.8	387	300

RA350

COMMERCIAL/VAN



3 ZIGZAG GROOVES

For excellent water evacuation to improve wet traction.

INTENSIVE SIPES

For improving wet traction and reducing noise level.

REINFORCED STRUCTURE

To minimize downtime, adopted more strong bead and belt construction.

DEEPER AND WIDER TREAD

For stable cornering and more mileage.

PRODUCT PERFORMANCE 8.90



Rim Diameter	Aspect Ratio	Speed Rating
13-17	85s-60s	Q/R/S/T



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
155R13C	90/88S	8PR	4.5	578	157	10.0	600	560	450
165R13C	94/93S	8PR	4.5	594	165	10.0	670	650	450
175R13C	97/95S	8PR	5.0	610	177	10.0	730	690	450
165R14C	96/95S	8PR	4.5	620	165	10.0	710	690	450
185R14C	102/100Q	8PR	5.5	650	188	9.0	850	800	450
195R14C	106/104Q	8PR	5.5	666	198	9.0	950	900	450
195R15C	106/104R	8PR	5.5	693	198	9.0	950	900	450
165/70R13C	88/86S	6PR	5.0	562	170	10.0	560	530	375
165/70R14C	84/80S	6PR	5.0	588	170	10.0	500	450	350
175/65R14C	90/88T	6PR	5.0	584	177	10.0	600	560	375
175/70R14C	98/96S	8PR	5.0	602	177	10.0	750	710	450
185/70R14C	102/100S	8PR	5.5	616	189	10.0	850	800	450
205/75R14C	109/107R	8PR	5.5	664	203	9.5	1030	975	475
195/70R15C	104/102R	8PR	6.0	655	201	9.0	900	850	450
205/65R15C	102/100T	6PR	6.0	647	209	9.0	850	800	375
205/75R15C	110/108R	8PR	5.5	689	203	9.5	1060	1000	475
215/65R15C	104/102T	6PR	6.5	661	221	9.0	900	850	375
175/75R16C	101/99R	8PR	5.0	668	177	9.0	825	775	475
185/75R16C	104/102R	8PR	5.0	684	184	9.0	900	850	475
195/65R16C	104/102R	8PR	6.0	660	201	9.0	900	850	475
215/60R16C	108/106T	8PR	6.5	664	221	9.0	1000	950	475
215/75R16C	116/114S	10PR	6.0	728	216	9.0	1250	1180	525
235/65R16C	115/113R	8PR	7.0	712	240	9.0	1215	1150	475
215/60R17C	109/107T	8PR	6.5	690	221	9.0	1030	975	475
235/60R17C	117/115T	10PR	7.0	714	240	9.0	1285	1215	525
LT185/85R16	111/109L	12PR	5.0	684	184	10.5	1090	1030	690
LT195/85R16	114/112L	12PR	5.5	744	196	8.7	1180/2600	1120/2470	650
LT205/85R16	117/115L	12PR	5.5	760	203	8.7	1285/2835	1215/2680	650



RA360

WINTER
COMMERCIAL/VAN



4 STRAIGHT
MAIN GROOVES

By considering slushy conditions, adopted 4 grooves to improve wet traction.

ZIGZAG 3D SIPES


For enhancing friction between road surface and tread surface on ice-snow roads.

OPEN SHOULDER

For adding gripping power and water evacuation on icy roads.

DEEPER AND
WIDER TREAD

Adopted for larger contact area with roads and longer mileage.

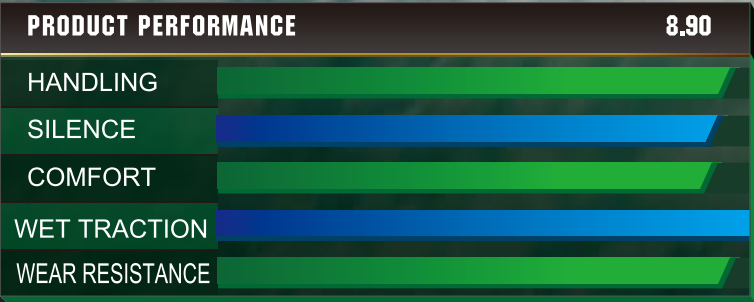

Rim Diameter	Aspect Ratio	Speed Rating
14-16	75s-65s	R



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
185R14C	102/100R	8PR	5.5	650	188	10.0	850	800	450
215/75R14C	112/110R	8PR	6.0	678	216	10.0	1120	1060	475
195/70R15C	104/102R	8PR	6.0	655	201	9.5	900	850	450
215/70R15C	109/107R	8PR	6.5	683	221	9.5	1030	975	450
225/70R15C	112/110R	8PR	6.5	697	228	9.5	1120	1060	450
185/75R16C	104/102R	8PR	5.0	684	184	9.0	900	850	475
195/65R16C	104/102R	8PR	6.0	660	201	9.5	900	850	475
195/75R16C	107/105R	8PR	5.5	698	196	9.5	975	925	475
205/65R16C	107/105R	8PR	6.0	672	209	9.5	975	925	475
215/65R16C	109/107R	8PR	6.5	686	221	9.5	1030	975	475
235/65R16C	115/113R	8PR	7.0	712	240	9.5	1215	1150	475

ICE-FIGHTER I

WINTER HP



SPECIAL Y-STYLE
DIRECTIONAL
PATTERN DESIGN

Improve the handling
stability in ice-snow
road conditions.

HIGH DENSITY
3DSIPES ON THE
TREAD PATTERN

Ensure the general rigidity
of the tread,improve the
adhesive power between
wheel and the ice-snow
ground,and strengthen
the holding ability.

OPEN GROOVES

For effective water evac-
uation,greatly reduce
the hydroplaning,and
ensure the safety on
ice-snow road.

ADVANCED SILICA
COMPOUND

Enhances the traction
and balance in winter
driving conditions.

PRODUCT PERFORMANCE		8.90
HANDLING		
SILENCE		
COMFORT		
WET TRACTION		
WEAR RESISTANCE		

Rim Diameter	Aspect Ratio	Speed Rating
13-17	70s-50s	T/H



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
165/70R13	79T	Std	5.0	562	170	8.4	437	300
165/70R14	81T	Std	5.0	588	170	8.4	462	300
175/65R14	82T	Std	5.0	584	177	8.4	475	300
175/70R14	88T	XL	5.0	602	177	8.4	560	340
185/60R14	82T	Std	5.5	578	189	8.5	475	300
185/65R14	86T	Std	5.5	596	189	8.5	530	300
185/70R14	88T	Std	5.5	616	189	8.5	560	300
175/65R15	84T	Std	5.0	609	177	8.4	500	300
185/60R15	88H	XL	5.5	603	189	8.5	560	340
185/65R15	88T	Std	5.5	621	189	8.5	560	300
195/50R15	82H	Std	6.0	577	201	8.7	475	300
195/55R15	85H	Std	6.0	595	201	8.7	515	300
195/60R15	88H	Std	6.0	615	201	8.7	560	300
195/65R15	91T	Std	6.0	635	201	8.7	615	300
205/65R15	94T	Std	6.0	647	209	8.7	670	300
195/55R16	91H	XL	6.0	620	201	8.7	615	340
205/55R16	91T	Std	6.5	632	214	9.0	615	300
205/60R16	96H	XL	6.0	652	209	8.7	710	340
215/55R16	97H	XL	7.0	642	226	8.7	730	340
215/60R16	99H	XL	6.5	664	221	8.7	775	340
225/55R16	99H	XL	7.0	654	233	8.7	775	340
205/50R17	93H	XL	6.5	638	214	8.7	650	340
215/55R17	98H	XL	7.0	668	226	8.7	750	340
225/50R17	98H	XL	7.0	658	233	8.7	750	340
225/55R17	101H	XL	7.0	680	233	8.7	825	340

ICE-FIGHTER II

WINTER SUV/UHP



Y-STYLE DIRECT-
IONAL PATTERN
DESIGN

Improve the handling
stabilit in ice-snow
road conditions.

HIGH DENSITY
3D SIPES

Strengthen the pattern
rigidity, and provide
excellent grip performance
on the ice land.

WELL-DESIGNED
FOOTPRINT

For excellent hanling
ability in both ice-snow
and dry-wet road
conditions.

ADVANCED SILICA
COMPOUND

Enhances the traction
and balance in winter
driving congitions.

PRODUCT PERFORMANCE		8.90
HANDLING		
SILENCE		
COMFORT		
WET TRACTION		
WEAR RESISTANCE		

Rim Diameter	Aspect Ratio	Speed Rating
16-19	70s-40s	T/H/V



Size	LI/SS	Std/XL	Rim	OD	Dimensions (mm)		Max.Load (kg)	Max.Press (kPa)
					SW	NSD		
215/65R16	98H	Std	6.5	686	221	8.7	750	300
215/70R16	100T	Std	6.5	708	248	8.7	800	300
245/70R16	111T	XL	7.0	750	221	9.2	1090	340
215/60R17	96H	Std	6.5	690	228	8.7	710	300
225/45R17	94H	XL	7.5	634	234	9.0	670	340
225/60R17	99H	Std	6.5	702	272	9.0	775	300
225/65R17	106H	XL	6.5	724	221	8.7	950	340
235/60R17	102H	Std	7.0	714	228	9.2	850	300
235/65R17	108H	XL	7.0	738	240	9.5	1000	340
265/65R17	112T	Std	8.0	776	240	9.2	1120	300
225/40R18	92V	XL	8.0	637	265	9.0	630	340
235/60R18	107H	XL	7.0	739	265	9.2	975	340
245/45R18	100V	XL	8.0	677	225	9.2	800	340
255/55R18	109H	XL	8.0	737	243	9.2	1030	340
255/50R19	107V	XL	8.0	739	230	9.2	975	340

RW777

WINTER SUV/UHP



ASYMMETRIC TREAD DEIGN

Provides balanced performance for different driving conditions.

ADVANCED SILICA COMPOUND

Keeps rubber flexible for maximum performance in extreme cold temperatures in winter.

HIGH DENSITY 3D SIPES

Ensure the general rigidity of the tread, improve the adhesive power between wheel and the ice-snow ground, and strengthen the holding ability.

WELL-DESIGNED FOOTPRINT

For excellent handling ability in both ice-snow and dry-wet road conditions.

PRODUCT PERFORMANCE

8.90

DRY CONDITION	
WET CONDITION	
COMFORT	
SILENCE	
WEAR RESISTANCE	

Rim Diameter ▾	Aspect Ratio ▾	Speed Rating ▾
15-22	75s-35s	T/H/V



Size	LI/SS	Std/XL	Rim	OD	Dimensions (mm) SW NSD	Max.Load (kg)	Max.Press (kPa)
215/75R15	100T	Std	6J	703	216 11.5	800	300
235/70R16	106T	Std	7J	736	240 11.5	950	300
215/50R17	91H	Std	7J	648	226 9.5	615	300
235/45R17	97V	XL	8J	644	236 9.5	730	340
235/55R17	103H	XL	7 1/2J	690	245 11.5	875	340
245/75R17	112T	Std	7J	800	248 11.5	1120	300
285/70R17	117T	Std	8 1/2J	832	292 11.5	1285	300
215/55R18	99H	XL	7J	693	226 11.5	775	340
225/45R18	95H	XL	7 1/2J	659	225 9.5	690	340
235/50R18	101V	XL	7 1/2J	693	245 11.5	825	340
235/55R18	104H	XL	7 1/2J	715	245 11.5	900	340
235/65R18	106T	Std	7J	763	240 11.5	950	300
245/50R18	104V	XL	7 1/2J	703	253 9.5	900	340
255/40R18	99V	XL	9J	661	260 9.5	775	340
255/45R18	103V	XL	8 1/2J	687	255 9.5	875	340
265/60R18	110T	Std	8J	775	272 11.5	1060	300
275/45R18	107V	XL	9J	705	273 9.5	975	340
285/60R18	116T	Std	8 1/2J	799	292 11.5	1250	300
225/45R19	96H	XL	7 1/2J	685	225 9.5	710	340
235/50R19	103V	XL	7 1/2J	719	245 11.5	875	340
245/45R19	102V	XL	8J	703	243 9.5	850	340
245/55R19	107H	XL	7.5J	753	253 9.5	975	340
255/45R19	104V	XL	8 1/2J	713	255 11.5	900	340
275/40R19	105V	XL	9 1/2J	703	278 9.5	925	340
275/55R19	111H	Std	8 1/2J	785	284 11.5	1090	300
245/40R20	99V	XL	8 1/2J	704	248 9.5	775	340
245/45R20	103V	XL	8J	728	243 11.5	875	340
245/50R20	105V	XL	7.5J	754	253 11.5	925	340
275/35R20	102V	XL	9 1/2J	700	278 9.5	850	340
275/40R20	106V	XL	9 1/2J	728	278 11.5	950	340
275/45R20	110V	XL	9J	756	273 11.5	1060	340
285/50R20	116V	XL	9J	794	297 11.5	1250	340
315/35R20	110V	XL	11J	728	320 11.5	1060	340
275/45R21	110V	XL	9J	781	273 11.5	1060	340
275/50R21	113V	XL	8.5J	809	284 11.5	1150	340
275/40R22	107V	XL	9 1/2J	779	278 11.5	975	340

ICE-POWERGRIP

WINTER STUDDABLE

- 
WINTER
- 
STUDDABLE
- 
WET TRACTION
- 
BRAKING
- 
SILICA

SPECIAL Y-STYLE DIRECTIONAL PATTERN DESIGN

Improve the handling stability in ice-snow road conditions.

HIGH DENSITY 3D SIPES

Strengthen the pattern rigidity, and provide excellent grip performance on the ice land.

MULTI-ROW STUDDABLE DESIGN IN SHOULDER BLOCKS

Provides general tread rigidity and excellent steering stability on ice-snow road.

VARIABLE PITCH

Enhances the traction and balance in winter driving conditions.

PRODUCT PERFORMANCE		8.90
HANDLING		
SILENCE		
COMFORT		
WET TRACTION		
WEAR RESISTANCE		

Rim Diameter	Aspect Ratio	Speed Rating
15-16	75s-65s	R/T

APPLICABLE MODELS

Size	LI/SS	Rim	OD	Dimensions (mm)		Max.Load (kg)		Max.Press (kPa)
				SW	NSD	Single	Dual	
195/65R15	91T	6.0	635	201	10.2	615	-	300
185/75R16C	104/102R 8PR	5.0	684	184	10.5	900	850	475

SPECIFICATION TAG& MARKING METHOD

TAG detail



Tire BrandROADCRUZA

Two bands successively passed all kinds of system certification

Specification225/50R17 94W

225 / 50 R 17 94 W

SeriesRA710

225 Section Width	W means maximum speed 270km/h.	94 Load Index
50 Aspect Ratio		W Speed Symbol
		17 RIM (inch)

Speed

Speed symbol indicates the maximum travel speed
That the tire can achieve under stated condition.

SS	Maximum Speed (km/h)	SS	Maximum Speed (km/h)
P	150	H	210
Q	160	V	240
S	180	W	270
T	190	Y	300
		* ZR	over 240km/h

- * ZR means a certain range of speed
- Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

Loading Index

Load index refers to numeral value of tire’ s maximum load ability under stated condition.

LI	LOADING CAPACITY	LI	LOADING CAPACITY	LI	LOADING CAPACITY	LI	LOADING CAPACITY
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						

SAFE&ECO DRIVING

SAFETY DRIVING

Please obey the traffic laws and regulations, keep cautious and respect the other drivers and pedestrians.

ECO DRIVING

The idea of “Green and Environment” is always recommended,and the advice below will save maintenance costs, extend service life of tire and save fuel.

TIRE USAGE

Tire Maintenance

For the sake of safety , you should check the tire regularly at least once a month. Be cautious about the damage and uneven wear, tire pressure abnormity, positioning, balance or suspension failure will affect overall tire performance and cause danger. Tire is the only contact surface between vehicles and ground, and it should be in a good condition.

- Check the tire pressure regularly, especially before long time driving. If tire is incorrectly inflated, it will lead to increase of rolling resistance and extra fuel consumption.
- Faster driving speed will result in greater air resistance so as to increase fuel consumption.
- Keep smooth driving will avoid abrupt acceleration and sudden braking.
- Convert to higher gear as soon as possible to prevent the engine running fast at lower gear.
- Use air conditioner properly. If you don’ t need it, turn off all electrical equipment, for example the electrically heated rear window.
- Get ready for starting the engine. Switch off the engine if you predict the car will park longer than a few minutes.
- Check the wheel positioning and wheel camber angle by professional tire maintenance personnel regularly, and make sure that the car running smoothly and stably, which is a important factor for fuel saving.

Tire Rotation

Tire rotation is a simple and effective way to prolong tire service life through balancing degree of wear.

